



professional  
wet and dry vacuum cleaners

2014



# l'azienda/company

**LA NOSTRA STORIA** - Elsea nasce nel 2001 dall'idea di un gruppo di giovani imprenditori, già esperti conoscitori del settore degli aspiratori industriali, con l'intento di coniugare tali esperienze all'elevata qualità del prodotto, interamente realizzato nei propri impianti, localizzati nel Sud Italia, in prossimità di importanti e strategiche arterie di comunicazione. I risultati non tardano ad arrivare ed Elsea si afferma presto come una nuova realtà nel nostro Paese dove, grazie allo standing elevato dei suoi prodotti, si confronta degnamente con i maggiori competitors del settore. La Compagine Aziendale si arricchisce nel 2004 di un nuovo Socio, con esperienza nella gestione amministrativa di aziende estere di elevate dimensioni, segnando di fatto la svolta internazionale di Elsea. Gli anni a seguire sono un continuo crescendo nell'acquisizione di clientela in tutto il mondo, ove offre un contributo non indifferente al rafforzamento del marchio "Made in Italy". Oggi i suoi prodotti, in una gamma continuamente allargata ed innovata, sono commercializzati sui mercati europei, americani, australiani, asiatici, russi e sud africani e la loro qualità è garantita a livello internazionale dalle certificazioni ISO 9001:2008, TUV-GS, cTUVus e GOST.

**OUR HISTORY** - Elsea was founded in 2001 by a group of young entrepreneurs, already experienced in the field of industrial vacuum cleaners. Their main object was to combine their deep knowledge of the cleaning market to high quality products, entirely made in their production facilities located in the south of Italy, close by important and strategic geographical areas. Thanks to the high standing of its products, The ELSEA Company established itself as a new commercial reality in the Italian market, matching properly against the main competitors of its relevant working area. In 2004 ELSEA's corporate structure was joined by a new partner with an important experience in the administration management of large-sized foreign companies. This actually marked the turning point towards the international trade. The following years showed an increase in the acquisition of customers around the world, where ELSEA gave its considerable contribution to the strengthening of the "Made in Italy" brand. Nowadays, its constant renewed and expanded range of products, whose quality is internationally certified by ISO 9001:2008, TUV-GS, cTUVus and GOST, is present all over the European, American, Australian, Asian, Russian and South African markets.

**MISSION AZIENDALE** - Elsea ha abbracciato nel 2008 un importante progetto di Marketing finalizzato alla realizzazione della piena "Soddisfazione del Cliente" attraverso una sempre maggiore attenzione alle esigenze dello stesso in termini di qualità, prezzo e relazione. Ben si coniuga con lo stesso la continua ricerca di soluzioni innovative, alle quali Elsea dedica risorse umane altamente professionali.

**OUR MISSION** - In 2008 ELSEA started an important marketing project aimed at achieving a more client orientation approach through a greater attention towards their needs in terms of QUALITY, PRICE and RELATIONSHIP. This project proposes a constant research of innovative solutions put in practice by high professional human resources.

## ELSEA E L'AMBIENTE - ELSEA AND THE ENVIRONMENT

Produzione annuale energia  
Yearly energy emissions production

250.000 kwh

Sono questi alcuni dei risultati ottenuti grazie all'impianto fotovoltaico, realizzato nel 2008 al di sopra dei nostri stabili, il quale ci ha permesso, oltre ad un evidente risparmio di costi, il raggiungimento di un obiettivo per noi altrettanto importante: la tutela dell'Ambiente. Profitto e rispetto di ciò che ci circonda, possono dunque essere perseguiti contemporaneamente ed Elsea ne è l'esempio lampante, isola felice in un mare altamente inquinato.

Olio combustibile risparmiato  
Saved heating oil

60.000 tons

CO2 non immesso in atmosfera  
CO2 not emitted in the atmosphere

110.000 tons

These are some of the results obtained thanks to the photovoltaic system, located in 2008 on the roof of our premises. This system allowed from one side an important costing saving, on the other the environment conservation that represents as well an important goal achieved. Profit and environmental respect can "walk" together: Elsea is a clear example of this combination, it is a peaceful isle in a polluted sea.




## codici/codes

Come leggere il codice identificativo del prodotto. Nell'esempio è riportato il codice **EWPR250** del prodotto Estro 250.

*How to read the product identification code.*

*This example shows the code EWPR250 of the product Estro 250.*

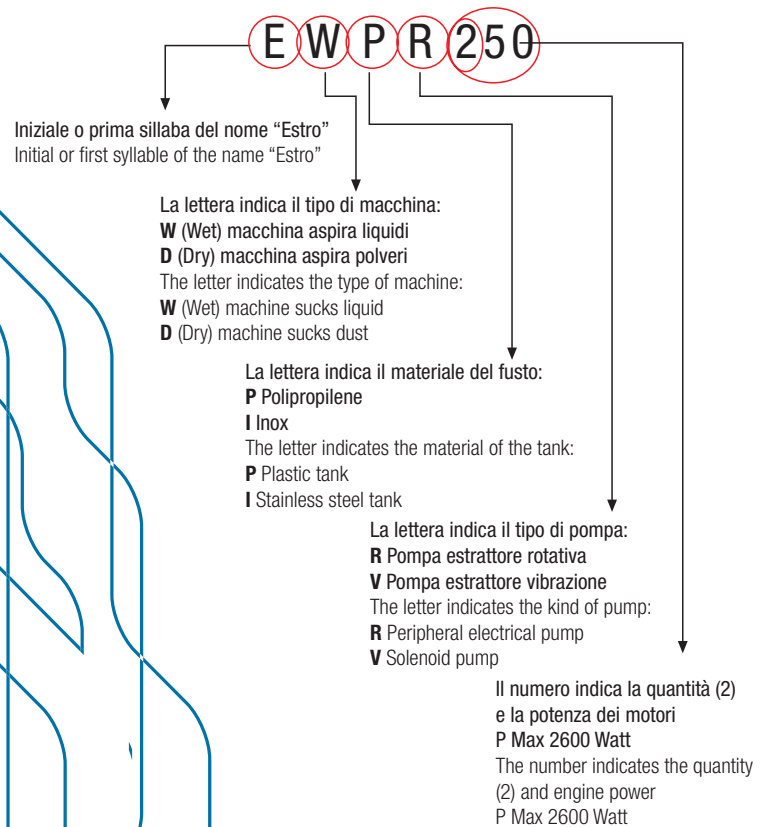

## indice/index





UNI EN ISO  
9001:2008



# esat

Tre modelli polvere ed uno polvere e liquidi. Leggero, maneggevole, serbatoio in polipropilene e ad un solo motore monostadio, il piccolo della gamma, ideale per la pulizia in spazi ridotti.

Three different versions of Dry and one version of Wet&Dry Vacuum Cleaners with a single stage motor. Light and manageable with polypropylene tank ESAT is the smallest of our range ideal for the cleaning of small spaces.



P fusto polipropilene  
P plastic tank



motore  
motor




D polvere  
D dry



W acqua  
W wet

		ESDP100	ESDP100SL	ESDP110 ESWP110	ESDP115
Numero motori	Number motors	1	1	1	1
Stadi motori	Stage	single	single	single	single
Volt (V)	Volt (V)	220-240	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60	50/60
Tipo raffreddamento	Cooling	thru flow	thru flow	by pass	thru flow
P max (W)	P max (W)	1150	1150	1250	1300
Potenza (W)	P (W)	1000	1000	1050	1100
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	1350	1350	1530	1480
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	220	220	258	228
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	58	55	58	58
Capacità tot. fusto (lt)	Total tank capacity (lt)	21	21	21	21
Peso (Kg)	Weight (Kg)	9,3	9,5	9,3	9,3




## Accessori/Accessories STANDARD

Kit: KD036E    Kit: KW036E (ES WP110)

1 2 3 4 5

1 2 3 4 6

Description	Code	Q.ty
1 Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
2 Little nozzle Ø36	<b>ACB0036</b>	1 pz
3 Crevice tool Ø36	<b>ACL036</b>	1 pz
4 Plastic extension wand (one piece) Ø36	<b>ACTP036</b>	2 pz
5 Plastic combined nozzle Ø36	<b>ACSP036P</b>	1 pz
6 Plastic combined nozzle W/D Ø36	<b>ACSP036W/D</b>	1 pz

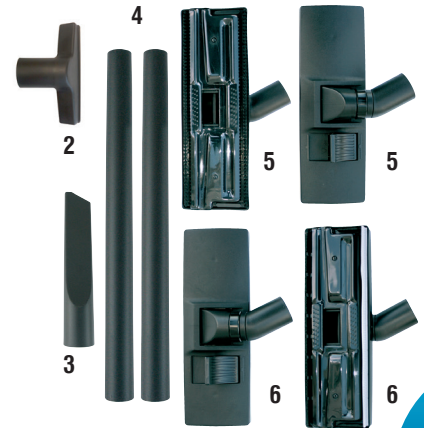

## Filtri e optional/Filters and options

Description	Code	note
7 Polyester filter with ring Ø34	<b>FA034PP</b>	standard
8 Paper bag 20lt	<b>FI003C</b>	optional in ESWP110
9 Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
10 Polyester bag 20lt	<b>FI003P</b>	optional
11 Sponge filter for liquids	<b>ACCA165A</b>	standard in ES WP110
12 Nylon filter Ø334	<b>FINY334AT</b>	optional
13 Dusting brush Ø34	<b>ACPE036</b>	optional
14 Rotating brush PP 0,15	<b>ACR0015</b>	optional
15 Floor turbo TB275 Ø36 ABS black	<b>ACFT275</b>	optional
16 Hand turbo TB 155 Ø36 EP black	<b>ACHT155</b>	optional



7



8



9



10



11



12



13



14



15



16



UNI EN ISO  
9001:2008



# ares dry & fly

Macchina compatta professionale solo polvere con motore bistadio. Disponibile con fusto in polipropilene o inox da 21/23lt. Ideale per la pulizia in spazi ridotti. Il modello FLY nasce per essere utilizzato negli aerei.

Compact and professional Dry Vacuum Cleaner with a double stage motor perfect to clean small spaces. It is available with stainless steel or polypropilene 21/23 litres tank. The FLY version has been studied to meet with the technical necessities of airplane cleaning.



I fusto acciaio inox  
I stainless steel tank



1 motore  
1 motor



D polvere  
D dry



P fusto polipropilene  
P plastic tank


**FLY**

		ADP100SLP ADI100SLP	ADP105 ADI105	ADP110 ADI110	ADP125 ADI125	ADP130 ADI130	FLDP100 FLDI100
Numero motori	Number motors	1	1	1	1	1	1
Stadi motori	Stage	single	double	double	double	double	single
Volt (V)	Volt (V)	220-240	220-240	220-240	220-240	220-240	110
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60	50/60	50/60	400
Tipo raffreddamento	Cooling	thru flow	thru flow	by pass	by pass	thru flow	thru flow
P max (W)	P max (W)	1150	1200	1250	1400	1400	1150
Potenza (W)	P (W)	1000	1000	1100	1200	1200	1000
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	1350	2200	2250	2400	2470	1350
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	220	185	170	215	205	220
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	55	60	60	60	60	58
Capacità tot. fusto (lt)	Total tank capacity (lt)	21/23	21/23	21/23	21/23	21/23	21/23
Peso (Kg)	Weight (Kg)	9,5/9,5	8,9/9,8	8,9/9,8	8,9/9,8	8,9/9,8	8,9/9,8




## Accessori/Accessories STANDARD Kit: KD036A

Description	Code	Q.ty
1 Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
2 Little nozzle Ø36	<b>ACB0036</b>	1 pz
3 Crevice tool Ø36	<b>ACLP036</b>	1 pz
4 Plastic extension wand Ø36	<b>ACTP036</b>	2 pz
5 Steel combined nozzle Ø36	<b>ACSP036</b>	1 pz
6 Dusting brush Ø36	<b>ACPE036</b>	1 pz

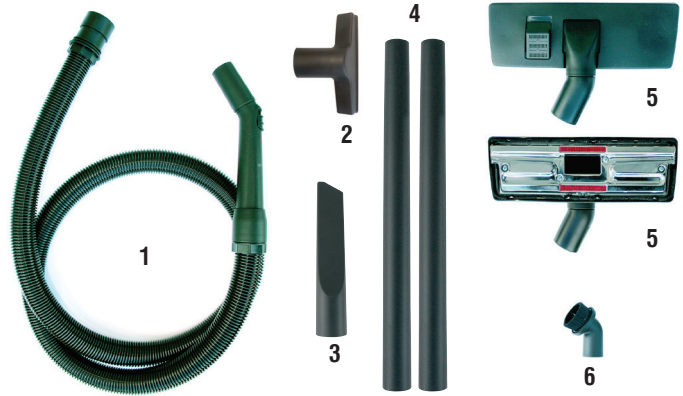

## Filtri e optional/Filters and optional

Description	Code	note
7 Polyester filter with ring Ø34	<b>FA034PP</b>	standard
8 Paper bag 20lt	<b>FI003C</b>	standard
9 Polyester bag 20lt	<b>FI003P</b>	optional
10 Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
11 Nylon filter Ø334	<b>FINY334AT</b>	optional
12 Power head L350	<b>ACES350</b>	optional
13 Rotating brush PP 0,15	<b>ACRO015</b>	optional

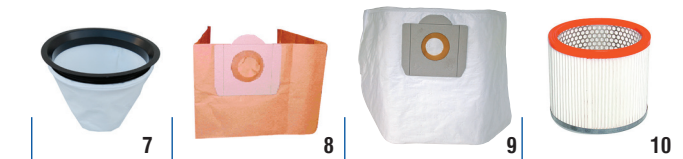

Only for  
ADP100SL/ADI100SLP





UNI EN ISO  
9001:2008



ares  
white  
rooms

**WHITE** aspirapolvere per **camere bianche** con filtrazione massima fino a **0,3 µm**.

Ideale per l'uso in ospedali, laboratori chimici/elettronici e in tutti i luoghi che necessitano di essere totalmente privi di contaminazione. **WHITE** è la macchina indispensabile per una perfetta "messa in bianco".

**WHITE**, Vacuum cleaner for **white rooms** with maximum filtration up to **0,3 µm**. It has been studied for hospitals, food industries, electronic/chemistry laboratories and all those places in which no contamination is admitted.



I fusto acciaio inox  
I stainless steel tank



camere  
bianche  
white rooms



motore  
motor



D polvere  
D dry



P fusto polipropilene  
P plastic tank


**WDP100**  
**WDI100**

Numero motori	Number motors	1
Stadi motori	Stage	single
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	thru flow
P max (W)	P max (W)	1150
Potenza (W)	P (W)	1000
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	1350
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	220
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	58
Capacità tot. fusto (lt)	Total tank capacity (lt)	21/23
Peso (Kg)	Weight (Kg)	9,3/9,5



## Accessori/Accessories STANDARD Kit: KD036W

Description	Code	Q.ty
<b>1</b> Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
<b>2</b> Little nozzle Ø36	<b>ACB0036</b>	1 pz
<b>3</b> Crevice tool Ø36	<b>ACLP036</b>	1 pz
<b>4</b> Chrome extension wand Ø36	<b>ACTC036</b>	2 pz
<b>5</b> Steel combined nozzle Ø36	<b>ACSP036</b>	1 pz
<b>6</b> Dusting brush Ø36	<b>ACPE036</b>	1 pz

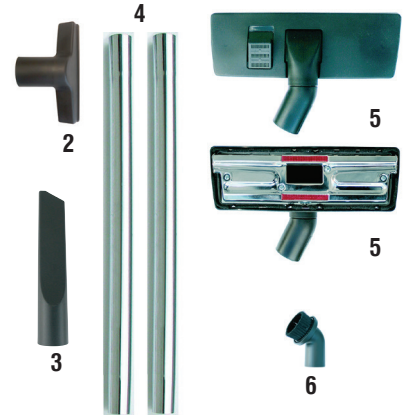

## Filtri e optional/Filters and options

Description	Code	note
<b>7</b> Polyester filter with ring Ø34	<b>FA044P</b>	standard
<b>8</b> Paper bag 20lt	<b>FI003C</b>	optional
<b>9</b> Polyester bag 20lt	<b>FI003P</b>	standard
<b>10</b> HEPA Cartridge filter Ø175 - H140	<b>FI175140H</b>	standard
<b>11</b> Power head L350	<b>ACES350</b>	optional



Socket  
Optional



UNI EN ISO  
9001:2008



# quiet

QUIET permette di pulire con estrema facilità qualsiasi superficie con una sorprendente silenziosità. L'aspiratore ha un commutatore che consente di lavorare a due diversi regimi: alta e bassa potenza. Inoltre, il modello è dotato di una spazzola combinata con ruote e di una spia di segnalazione per filtro sporco o sacco pieno.

QUIET: a model designed to guarantee extra comfort and versatility. This vacuum cleaner has a two speed switch which allows to work High or Low power: on Low the motor works at lower noise level. The accessories include a professional combined floor tool. This model is provided with a red warning light which switches on automatically when the filter is dirty or when the dust bag is full.



P fusto polipropilene  
P plastic tank



motore  
motor



D polvere  
D dry



## QDP125


Numero motori	Number motors	1
Stadi motori	Stage	single
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	thru flow
P max (W)	P max (W)	1400 (900 LOW)
Potenza (W)	P (W)	1200 (800 LOW)
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400 (1600 LOW)
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	205
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	54
Capacità tot. fusto (lt)	Total tank capacity (lt)	21
Peso (Kg)	Weight (Kg)	12



## Accessori/Accessories STANDARD



Kit: KD036Q

Description	Code	Q.ty
1 Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
2 Little nozzle Ø36	<b>ACB0036</b>	1 pz
3 Crevice tool Ø36	<b>ACLP036</b>	1 pz
4 Chrome Extension Hose Ø36	<b>ACTC036</b>	2 pz
5 Steel Combined Nozzle Ø36 36 with wheels	<b>ACSP036RTH</b>	1 pz
6 Dusting brush Ø36	<b>ACPE036</b>	1 pz
7 Accessories holder Ø36	<b>CPPA003</b>	1 pz

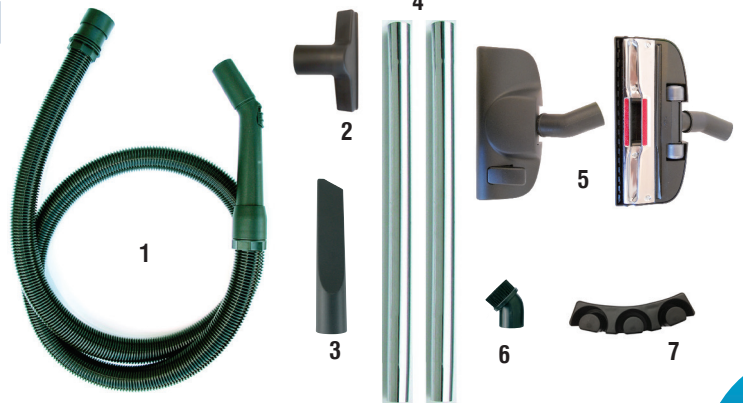

## Filtri e optional/Filters and options

Description	Code	note
8 Polyester filter with ring Ø34	<b>FA034P</b>	standard
9 Paper bag 20lt	<b>FI003C</b>	standard
10 Rotating brush PP 0,15	<b>ACR0015</b>	optional
11 Floor turbo TB275 Ø36 ABS black	<b>ACFT275</b>	optional
12 Hand turbo TB 155 Ø36 EP black	<b>ACHT155</b>	optional

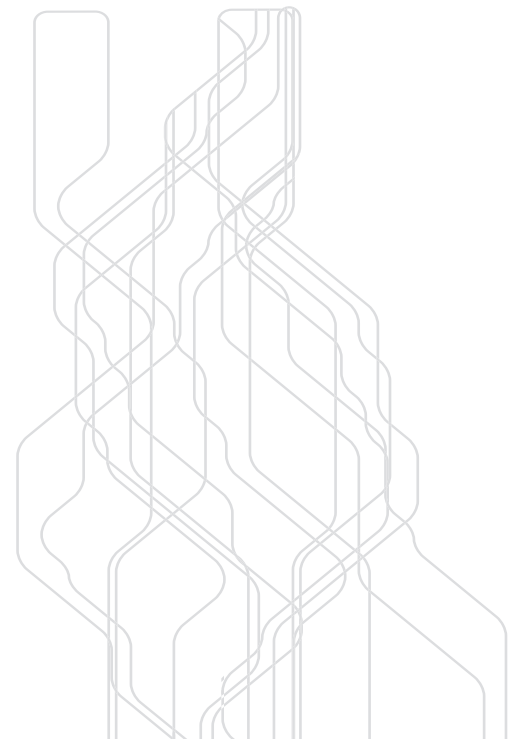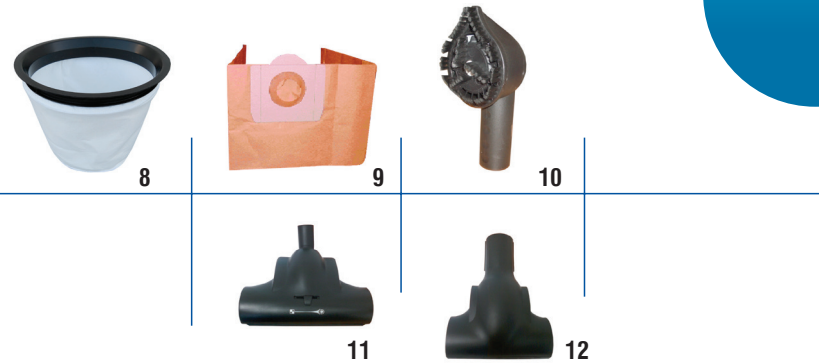



# quiet junior

QUIET permette di pulire con estrema facilità qualsiasi superficie con una sorprendente silenziosità. L'aspiratore ha un commutatore che consente di lavorare a due diversi regimi: alta e bassa potenza. Inoltre, il modello è dotato di una spazzola combinata con ruote e di una spia di segnalazione per filtro sporco o sacco pieno.

QUIET an model designed to guarantee extra comfort and versatility. This vacuum cleaner has a two speed switch which allows to work High or Low power: on Low the motor works at lower noise level. The accessories include a professional combined floor tool. This model is provided with a red warning light which switches on automatically when the filter is dirty or when the dust

I fusto acciaio inox  
I stainless steel tank



motore  
motor



D polvere  
D dry




## QDI125J

Numero motori	Number motors	1
Stadi motori	Stage	double
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	thru flow
P max (W)	P max (W)	1400 (900 LOW)
Potenza (W)	P (W)	1200 (800 LOW)
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400 (1600 LOW)
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	205
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	54
Capacità tot. fusto (lt)	Total tank capacity (lt)	13
Peso (Kg)	Weight (Kg)	12





## Accessori/Accessories STANDARD Kit: KD036Q

Description	Code	Q.ty
<b>1</b> Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
<b>2</b> Little nozzle Ø36	<b>ACB0036</b>	1 pz
<b>3</b> Crevice tool Ø36	<b>ACLPO36</b>	1 pz
<b>4</b> Chrome Extension Hose Ø36	<b>ACTC036</b>	2 pz
<b>5</b> Steel Combined Nozzle Ø36 36 with wheels	<b>ACSP036RT</b>	1 pz
<b>6</b> Dusting brush Ø36	<b>ACPE036</b>	1 pz
<b>7</b> Accessories holder Ø36	<b>CPPA003</b>	1 pz

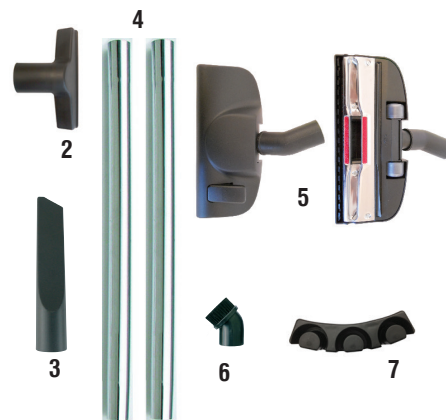

## Filtri e optional/Filters and options

Description	Code	note
<b>8</b> Polyester filter with ring Ø34	<b>FA034PPH8</b>	standard
<b>9</b> Paper bag 20lt	<b>FI002C</b>	standard
<b>10</b> Rotating brush PP 0,15	<b>ACR0015</b>	optional
<b>11</b> Floor turbo TB275 Ø36 ABS black	<b>ACFT275</b>	optional
<b>12</b> Hand turbo TB 155 Ø36 EP black	<b>ACHT155</b>	optional

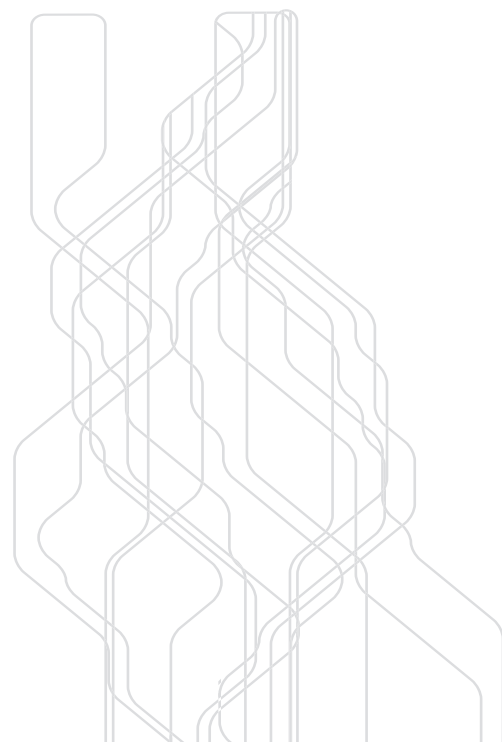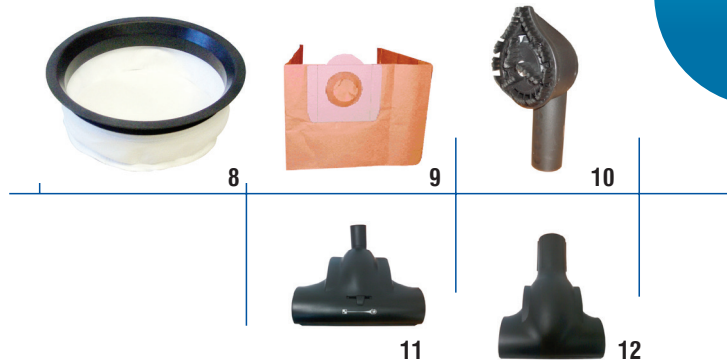



UNI EN ISO  
9001:2008



## bio wet & dry

Macchina compatta professionale polifunzionale utilizzabile come aspira liquidi-aspirapolvere con filtro ad acqua (3,5lt di H<sub>2</sub>O) oppure con filtro poliestere a cartuccia. Bio trattiene fino al 99,9% delle polveri contenute nell'aria. Ottimo antiacaro e umidificatore. Contenitore trasparente in plastica resistente da 21lt; motore by-pass con ottime prestazioni.

Professional compact multifunction equipment: BIO is a wet and dry vacuum cleaner with water filter (3,5lt of H<sub>2</sub>O) also provided with a polyester cartridge filter that allows to retain dust of air up to 99,9%. High performance by pass motor, see-through 21lt polypropylene tank, anti-acarus, humidifier.



P fusto polipropilene  
P plastic tank



motore  
motor



D polvere  
D dry



W acqua  
W wet


### BWP110

Numero motori	Number motors	1
Stadi motori	Stage	single
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	by pass
P max (W)	P max (W)	1250
Potenza (W)	P (W)	1050
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	1530
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	258
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	21
Peso (Kg)	Weight (Kg)	10,5




## Accessori/Accessories STANDARD Kit: KD036B

Description	Code	Q.ty
<b>1</b> Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
<b>2</b> Little nozzle Ø36	<b>ACB0036</b>	1 pz
<b>3</b> Crevice tool Ø36	<b>ACLP036</b>	1 pz
<b>4</b> Chrome extension wand Ø36	<b>ACTC036</b>	2 pz
<b>5</b> Steel combined nozzle Ø36	<b>ACSP036</b>	1 pz
<b>6</b> Liquid nozzle Ø36	<b>ACSM036</b>	1 pz
<b>7</b> Dusting brush Ø36	<b>ACPE036</b>	1 pz
<b>8</b> Accessories holder Ø36	<b>CPPA003</b>	1 pz

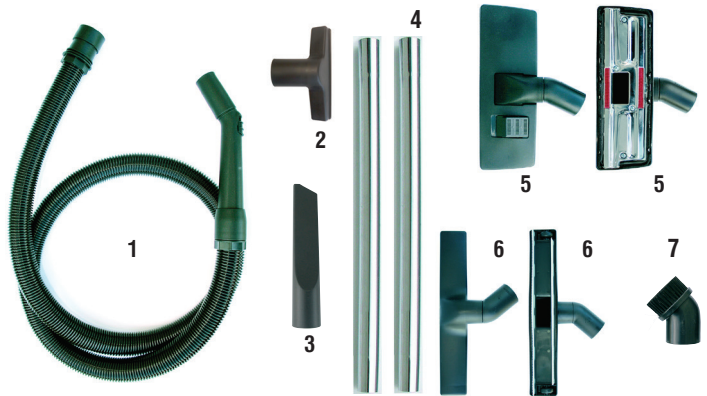

## Filtri e optional/Filters and options

Description	Code	note
<b>9</b> Cartridge filter Ø253	<b>F1225253P</b>	standard
<b>10</b> Power head L350	<b>ACES350</b>	optional
<b>11</b> Rotating brush PP 0,15	<b>ACR0015</b>	optional
<b>12</b> Floor turbo TB275 Ø36 ABS black	<b>ACFT275</b>	optional
<b>13</b> Hand turbo TB 155 Ø36 EP black	<b>ACHT155</b>	optional

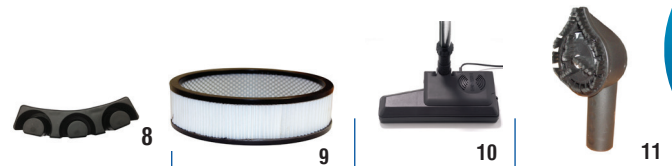



Socket  
Optional



12



13

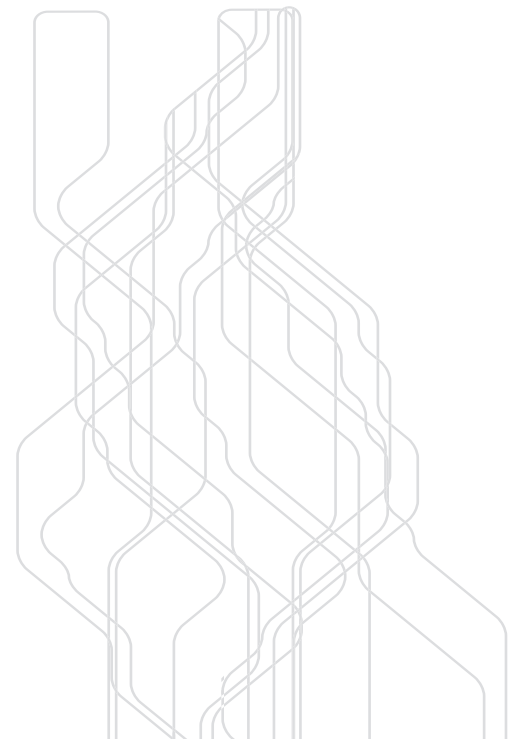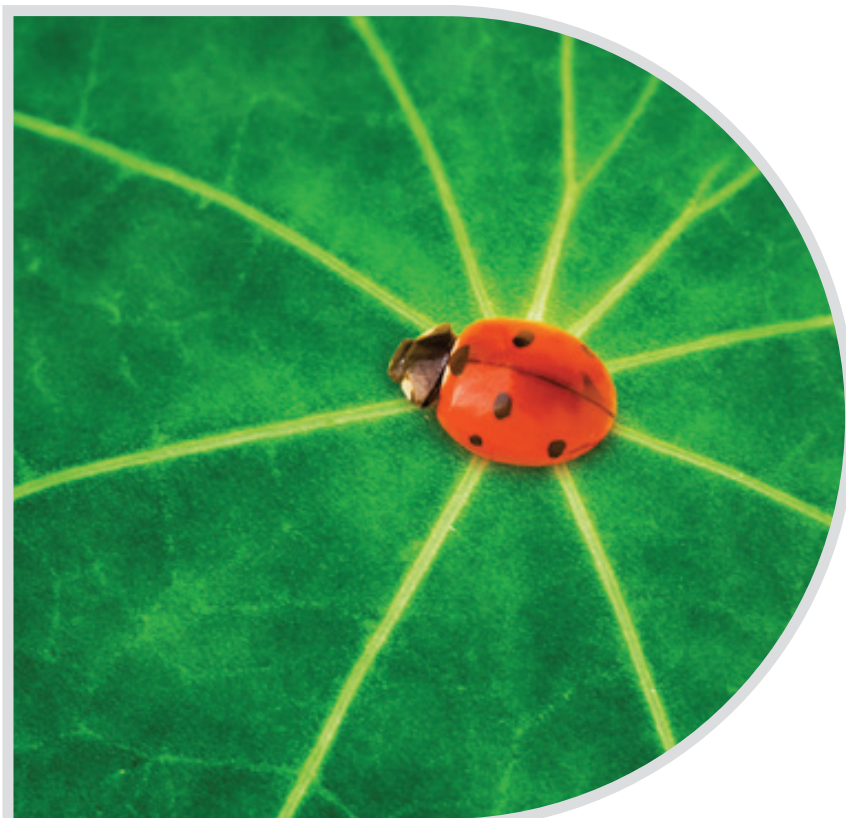



UNI EN ISO  
9001:2008



# green line

“Green Line” ELSEA è una gamma di prodotti verdi dal punto di vista dei consumi. Linea di aspiratori in due versioni: Inox, con una capacità fusto da 13 e 23 litri, o Polipropilene, da 21 litri, “Green Line” ha un elevato rendimento in termini di prestazioni ed efficienza grazie ad un motore elettrico di nuova generazione che con appena 750W di potenza garantisce le stesse prestazioni di un motore di vecchia generazione da 1250W, con un risparmio energetico del 40%. I modelli “Green Line” GLI13, GLP21 e GLI23 sono silenziosi, robusti, compatti e dotati di accessori ergonomici, ruote antitraccia, porta accessori e parking.

Available with a 13/23 liters stainless steel capacity tank or with a 21 liters Polypropylene capacity tank, “GREEN LINE” delivers great performance in terms of efficiency and consumption, thanks to the use of a next generation 750W Pmax electric motor, which is able to grant the same performances of a 1250W motor, with less 40% of power consumption. The GLI13, GLP21 and GLI23 are silent, rugged and compact models equipped with ergonomic accessories, non-marking wheels, accessories holder and parking.



I fusto acciaio inox  
I stainless steel tank



motore  
motor



D polvere  
D dry



P fusto polipropilene  
P plastic tank

		GLI13	GLP21	GLI23
Numero motori	Number motors	1	1	1
Stadi motori	Stage	single	single	single
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	thru flow	thru flow	thru flow
P max (W)	P max (W)	750	750	750
Potenza (W)	P (W)	700	700	700
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2150	2150	2150
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	190	190	190
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	54	54	54
Capacità tot. fusto (lt)	Total tank capacity (lt)	13	21	23
Peso (Kg)	Weight (Kg)	11	12	13
Tipo fusto	Type tank	Inox	PP	Inox




## Accessori/Accessories STANDARD Kit: KD036G

Description	Code	Q.ty
1 Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
2 Little nozzle Ø36	<b>ACB0036</b>	1 pz
3 Crevice tool Ø36	<b>ACL036</b>	1 pz
4 Metal telescopic tube Ø36	<b>ACTT036</b>	1 pz
5 Steel combined nozzle Ø36 with wheels	<b>ACSP036RTH</b>	1 pz
6 Dusting brush Ø36	<b>ACPE036</b>	1 pz
7 Accessories holder Ø36	<b>CPPA003</b>	1 pz





4



7

## Filtri e optional/Filters and options

Description	Code	note
8 Polyester filter with ring Ø34 H80,0mm	<b>FA034PPH8</b>	standard
9 Paper bag 13lt	<b>FI002C</b>	per GLI13
10 Paper bag 21lt	<b>FI003C</b>	per GLP21/GLI23
11 Rotating brush PP 0,15	<b>ACR0015</b>	optional
12 Floor turbo TB275 Ø36 ABS black	<b>ACFT275</b>	optional
13 Hand turbo TB 155 Ø36 EP black	<b>ACHT155</b>	optional

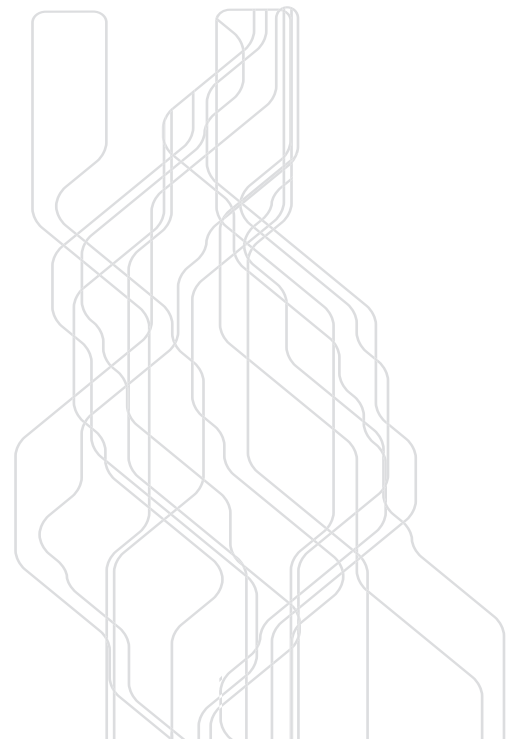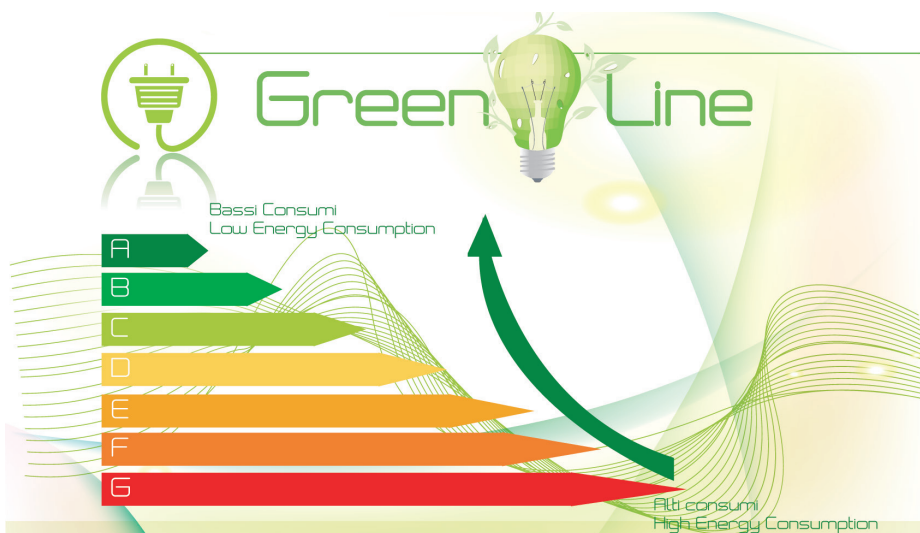



UNI EN ISO  
9001:2008



## ares wet&dry

Macchina compatta professionale polvere e liquidi. Disponibile con motore bistadio e fusto polipropilene o inox da 21/23lt. Ideale per la pulizia in spazi ridotti.

Compact and professional Wet&Dry Vacuum Cleaner with a double stage motor perfect to clean small spaces. It is available with stainless steel or polypropylene 21/23 litres tank.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



motore  
motor



D polvere  
D dry




W acqua  
W wet

		AWP110 AWI110	AWP125 AWI125
Numero motori	Number motors	1	1
Stadi motori	Stage	double	double
Volt (V)	Volt (V)	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass
P max (W)	P max (W)	1250	1400
Potenza (W)	P (W)	1100	1200
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2250	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	170	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	21/23	21/23
Peso (Kg)	Weight (Kg)	9,2/10,1	9,2/10,1



## Accessori/Accessories STANDARD Kit: KITW036

Description	Code	Q.ty
<b>1</b> Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
<b>2</b> Little nozzle Ø36	<b>ACB0036</b>	1 pz
<b>3</b> Crevice tool Ø36	<b>ACLP036</b>	1 pz
<b>4</b> Chrome extension wand Ø36	<b>ACTC036</b>	2 pz
<b>5</b> Steel combined nozzle Ø36	<b>ACSP036</b>	1 pz
<b>6</b> Liquid nozzle Ø36	<b>ACSM036</b>	1 pz
<b>7</b> Dusting brush Ø36	<b>ACPE036</b>	1 pz

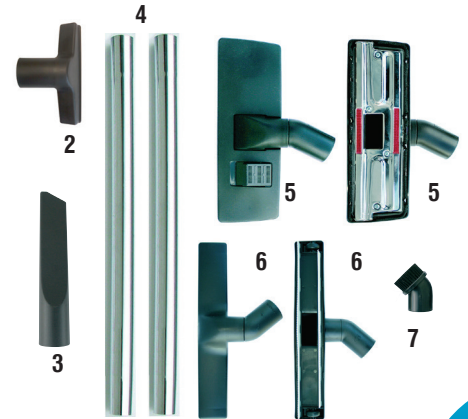

## Filtri e optional/Filters and optional

Description	Code	note
<b>8</b> Polyester filter with ring Ø34	<b>FA034PP</b>	standard
<b>9</b> Paper bag 20lt	<b>FI003C</b>	optional
<b>10</b> Polyester bag 20lt	<b>FI003P</b>	optional
<b>11</b> Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
<b>12</b> Nylon filter Ø334	<b>FINY334AT</b>	optional
<b>13</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>14</b> Power head L350	<b>ACES350</b>	optional
<b>15</b> Rotating brush PP 0,15	<b>ACR0015</b>	optional
<b>16</b> Floor turbo TB275 Ø36 ABS black	<b>ACFT275</b>	optional
<b>17</b> Hand turbo TB Ø36 EP black	<b>ACHT155</b>	optional



Socket  
optional



UNI EN ISO  
9001:2008



# mini beat

MINI BEAT: macchina compatta professionale POLVERE E LIQUIDI. Disponibile con motore bi-stadio e fusto plastica o inox da 21/23 lt. Con vibratore automatico ad azionamento manuale per la pulizia rapida ed efficace del filtro.

MINI BEAT compact and professional WET&DRY vacuum cleaner with a double stage motor and with stainless steel or polypropylene 21/23 litres tank. This machine is equipped with an automatic filter shaker manual device for an effective filter cleaning.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



motore  
motor



D polvere  
D dry



W acqua  
W wet



filtro  
autopulente  
intelligent  
cleaning filter


		VWP110 VWI110	VWP125 VWI125
Numero motori	Number motors	1	1
Stadi motori	Stage	double	double
Volt (V)	Volt (V)	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass
P max (W)	P max (W)	1250	1400
Potenza (W)	P (W)	1100	1200
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2250	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	170	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	21/23	21/23
Peso (Kg)	Weight (Kg)	9,2/10,1	9,2/10,1



## Accessori/Accessories STANDARD

Kit: KITW036

Description	Code	Q.ty
<b>1</b> Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
<b>2</b> Little nozzle Ø36	<b>ACB0036</b>	1 pz
<b>3</b> Crevice tool Ø36	<b>ACLP036</b>	1 pz
<b>4</b> Chrome extension wand Ø36	<b>ACTC036</b>	2 pz
<b>5</b> Steel combined nozzle Ø36	<b>ACSP036</b>	1 pz
<b>6</b> Liquid nozzle Ø36	<b>ACSM036</b>	1 pz
<b>7</b> Dusting brush Ø36	<b>ACPE036</b>	1 pz

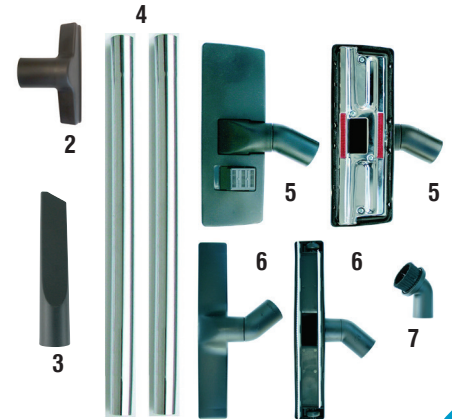

## Filtri e optional/Filters and options

Description	Code	note
<b>8</b> Polyester filter with ring Ø34	<b>FA034PP</b>	standard
<b>9</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>10</b> Paper bag 20lt	<b>FI003C</b>	optional
<b>11</b> Polyester bag 20lt	<b>FI003P</b>	optional
<b>12</b> Nylon filter Ø334	<b>FINY334AT</b>	optional



8



9



10



11



12



UNI EN ISO  
9001:2008



# ares plus

Modello polvere e liquidi con capacità del fusto di 37lt. Un solo motore bistadio e fusto polipropilene o inox.

Wet&Dry Vacuum Cleaner with a double stage motor. It is available with stainless steel or polypropylene 37 litres tank.

Disponibile anche in versione:



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



motore  
motor



D polvere  
D dry





W acqua  
W wet

		AWP110P AWI110P	AWP125P AWI125P
Numero motori	Number motors	1	1
Stadi motori	Stage	double	double
Volt (V)	Volt (V)	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass
P max (W)	P max (W)	1250	1400
Potenza (W)	P (W)	1100	1200
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2250	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	170	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	37	37
Peso (Kg)	Weight (Kg)	12,6/13,7	12,6/13,7




## Accessori/Accessories STANDARD Kit: KITW1040PL

Description	Code	Q.ty
<b>1</b> Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	1 pz
<b>2</b> Crevice tool Ø40	<b>ACLP040</b>	1 pz
<b>3</b> Chrome extension wand Ø40	<b>ACTC038D</b>	1 pz
<b>4</b> Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	1 pz
<b>5</b> Nozzle body A/P L300 Ø40	<b>ACCS300A/P</b>	2 pz
<b>6</b> Slide-on for liquids nozzle L300	<b>ACIL300</b>	1 pz
<b>7</b> Slide-on brush for floor nozzle L300	<b>ACIP300</b>	1 pz
<b>8</b> Dusting brush Ø40	<b>ACPE040</b>	1 pz

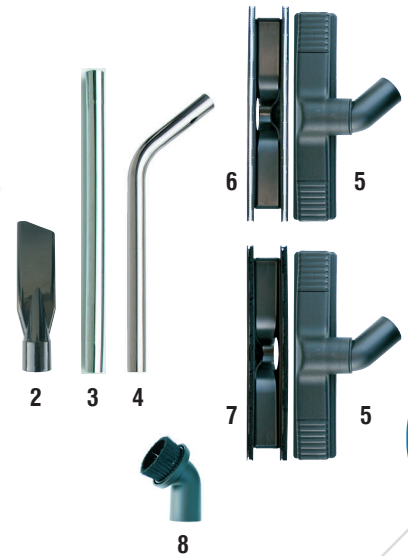

## Filtri e optional/Filters and options

Description	Code	note
<b>9</b> Polyester filter with ring Ø34	<b>FA034P</b>	standard
<b>10</b> Paper bag 36lt	<b>FI004C</b>	optional
<b>11</b> Polyester bag 36lt	<b>FI004P</b>	optional
<b>12</b> Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
<b>13</b> Nylon filter Ø334	<b>FINY334AT</b>	optional
<b>14</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>15</b> Power head L350	<b>ACES350</b>	optional
<b>16</b> Slide-on for carpet nozzle L300	<b>ACIT300</b>	optional
<b>17</b> Complete Handle Ø25 Black Tank 36lt	<b>CMMA025/36C</b>	optional
<b>18</b> Accessory basket L350	<b>ACCE350</b>	optional

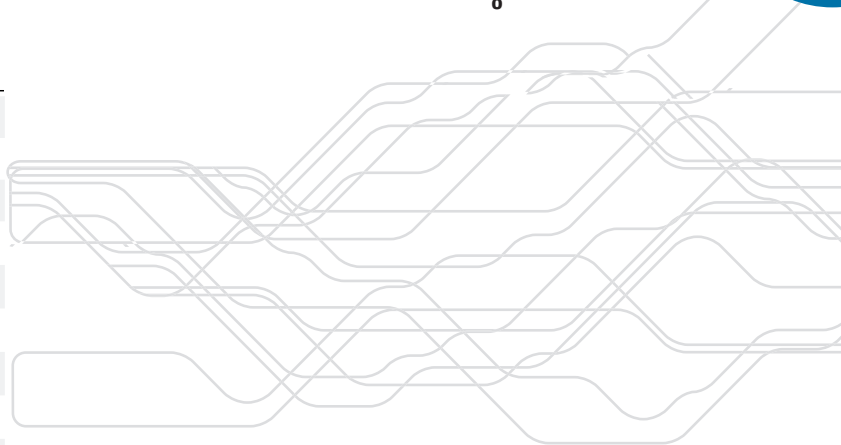

Socket optional



CDI125

CE  
UNI EN ISO  
9001:2008




CDI125V



ares  
ash

ARES ASH è la risposta professionale di ELSEA ad una specifica esigenza del settore della panificazione: la pulizia di forni dai residui/ceneri incombuste. Dotato di fusto INOX 23lt+23lt e di un motore bistadio da 1400W ad elevata prestazione, ASH è anche disponibile nella versione con SCUOTIFILTRO per una maggiore efficienza di lavoro.


ARES ASH is the ELSEA professional response to a specific market requirement of the baking sector: the cleaning of ovens/fireplaces from unburnt residues/ashes. Equipped with a 23lt+23lt Stainless steel tanks and a 1400W double stage motor with high performance, ASH is also available with a FILTER SHAKER for a greater working efficiency.



		CDI125	CDI125V
Numero motori	Number motors	1	1
Stadi motori	Stage	double	double
Volt (V)	Volt (V)	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass
P max (W)	P max (W)	1400	1400
Potenza (W)	P (W)	1200	1200
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	23 lt	23 lt
Peso (Kg)	Weight (Kg)	12,6/13,7	12,6/13,7


## Accessori/Accessories OPTIONALS KIT: KD036A

Description	Code	Q.ty
<b>1</b> Flexible hose mt.2,0 with handle Ø36	<b>ACTF036/2/CI</b>	1 pz
<b>2</b> Little nozzle Ø36	<b>ACB0036</b>	1 pz
<b>3</b> Crevice tool Ø36	<b>ACLP036</b>	1 pz
<b>4</b> Plastic extension wand Ø36	<b>ACTP036</b>	2 pz
<b>5</b> Steel combined nozzle Ø36	<b>ACSP036</b>	1 pz
<b>6</b> Dusting brush Ø36	<b>ACPE036</b>	1 pz
<b>7</b> Dusting brush Ø40	<b>ACPE040</b>	1 pz

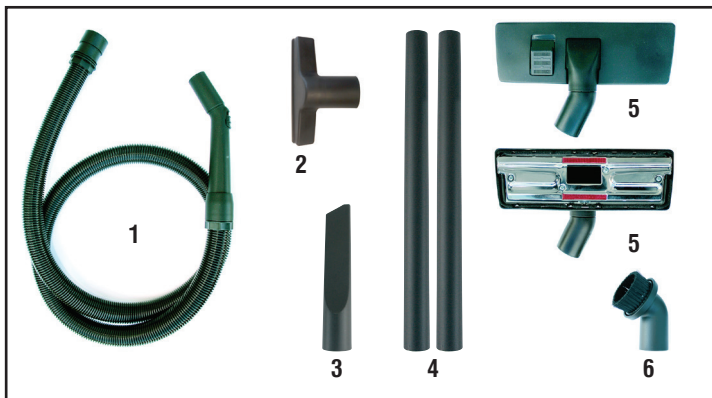


## Accessori/Accessories OPTIONALS KIT: KITV040

Description	Code	Q.ty
<b>8</b> Complete flexible hose mt. 2,5 Ø40	<b>ACTF38/2,5/C</b>	1 pz
<b>9</b> Crevice tool Ø40	<b>ACLP040</b>	1 pz
<b>10</b> Chrome extension wand Ø40	<b>ACTC038D</b>	1 pz
<b>11</b> Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	1 pz
<b>12</b> Nozzle body A/P L300 Ø40	<b>ACCS300A/P</b>	1 pz
<b>13</b> Slide-on brush for floor nozzle L300	<b>ACIP300</b>	1 pz
<b>14</b> Dusting brush Ø40	<b>ACPE040</b>	1 pz

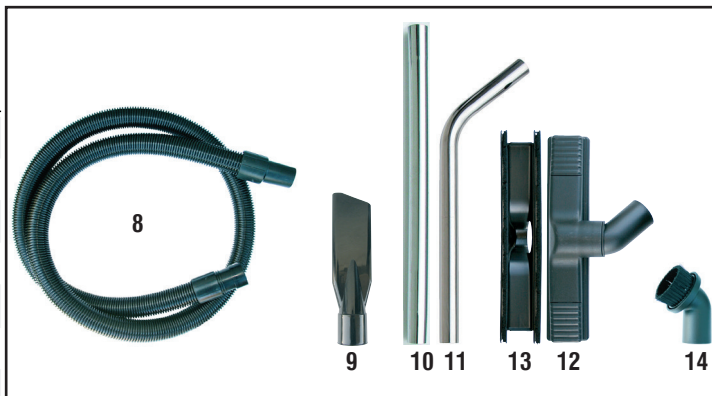


## Accessori/Accessories OPTIONALS KIT: KIT038FSMC

Description	Code	Q.ty
<b>15</b> Flexible hose in steel and ceramic with couplings Ø36 2,5m	<b>ACTF036M</b>	1 pz
<b>16</b> Straight aluminum wand with half protection L1,0 mt	<b>ACTA038DSA</b>	1 pz
<b>17</b> Oven brush with teflon L400mm	<b>ACCV400FM</b>	1 pz

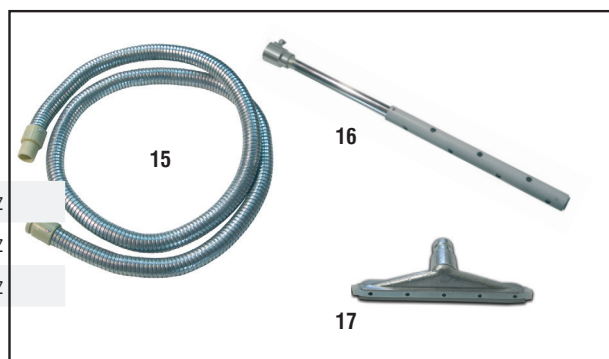


## Accessori/Accessories OPTIONALS KIT: KIT038FA

Description	Code	Q.ty
<b>18</b> Flexible hose in steel and ceramic with couplings Ø36	<b>ACTF036M1</b>	1 pz
<b>19</b> Short metal hose Ø38	<b>ACTR036</b>	1 pz

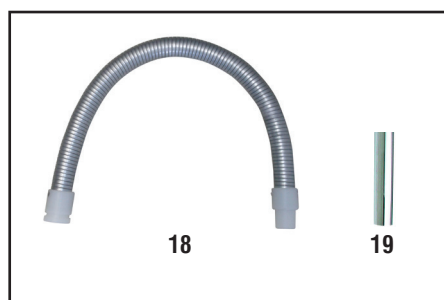

## Filtri/Filters

Description	Code	
<b>20</b> Cartridge filter Ø175 - H140	<b>FI175140P per CDI125</b>	standard
<b>21</b> Conic HEPA cartridge filter Ø202 - H153	<b>FI202153HP per CDI125V</b>	standard

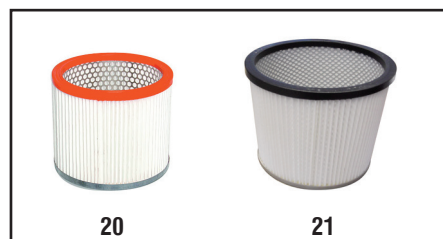

**NEW  
WITH BATTERY**

CE  
UNI EN ISO  
9001:2008



## ares recharge

ARES RECHARGE aspiratore polvere e liquidi dotato di un motore 24Volt e batterie per l'utilizzo senza cavo elettrico. La macchina ha una autonomia di lavoro che supera i 90 minuti con ottime prestazioni in aspirazione. Fusto 21lt in acciaio inox, carrello principale robusto e maneggevole con cestello portaccessori e ruota anteriore girevole. L'aspiratore è dotato di vano porta batterie con ruote.

ARES RECHARGE is a BATTERY wet and dry vacuum cleaner equipped with a 24Volt motor with an operating time for up to 90 minutes, for great performances in terms of suction.

21lt Stainless steel tank with a robust and handy trolley equipped with front swivel wheels and accessories holder. The unit includes a compartment for batteries with wheels.



fusto acciaio inox  
stainless steel tank



motore  
motor



D polvere  
D dry



W acqua  
W wet


AWI50024

Numero motori	Number motors	1
Stadi motori	Stage	double
Volt (V)	Volt (V)	24Vdc
Frequenza (Hz)	Frequency (Hz)	c.c
Tipo raffreddamento	Cooling	by pass
P max (W)	P max (W)	550
Potenza (W)	P (W)	460
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	1400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	120
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	54
Capacità tot. fusto (lt)	Total tank capacity (lt)	230/50
Autonomia (V/Hz)	Recharge (V/Hz)	1h 30°
Peso senza batteria (Kg)	Weight Without Battery (Kg)	19
Peso con batteria (Kg)	Weight Battery (Kg)	40




## Accessori/Accessories STANDARD Kit: KITW032

Description	Code	Q.ty
<b>1</b> Flexible hose mt.3,0 with handle Ø36	<b>ACTF032/3/CI</b>	1 pz
<b>2</b> Little nozzle Ø36	<b>ACB0032</b>	1 pz
<b>3</b> Crevice tool Ø36	<b>ACLP032</b>	1 pz
<b>4</b> Chrome extension wand Ø36	<b>ACTC032</b>	2 pz
<b>5</b> Steel combined nozzle Ø36	<b>ACSP032RT</b>	1 pz
<b>6</b> Liquid nozzle Ø36	<b>ACSM032</b>	1 pz
<b>7</b> Dusting brush Ø36	<b>ACPE032</b>	1 pz

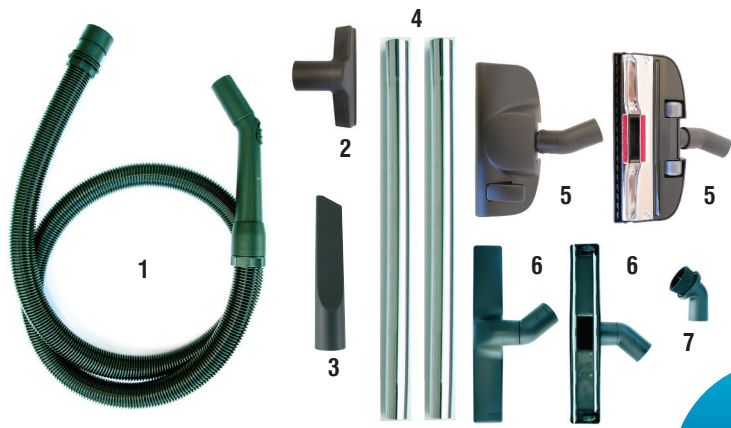

## Filtri e optional/Filters and options

Description	Code	note
<b>8</b> Polyester filter with ring Ø34	<b>FA034PP</b>	standard
<b>9</b> Paper bag 20lt	<b>FI003C</b>	optional
<b>10</b> Polyester bag 20lt	<b>FI003P</b>	optional
<b>11</b> Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
<b>12</b> Sponge filter for liquids	<b>ACCA165A</b>	standard

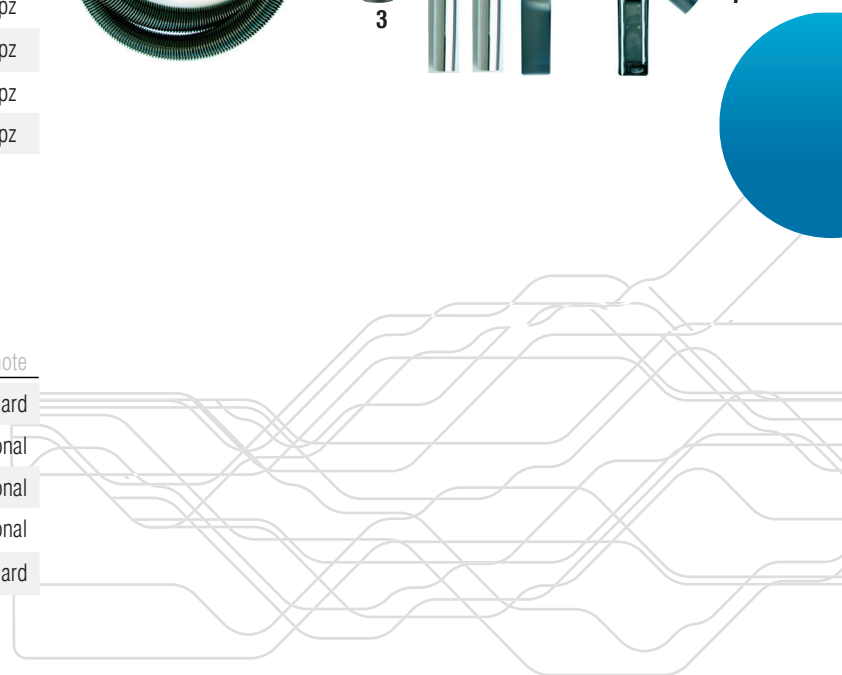

8



9



10



11



12



# exel

Aspirapolvere e liquidi. Disponibile con uno, due o tre motori bistadio fino ad una potenza massima di 3600W, con fusto in polipropilene o inox da 76lt di capacità. Ideale per la pulizia professionale.

Wet&Dry Vacuum Cleaner provided with one, two or three double stage motors, reaching 3600W maximum power. Ideal for professional cleaning. It is available with stainless steel or polypropylene 76 litres tank.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



D polvere  
D dry



W acqua  
W wet



1  
motore  
motor




2  
motori  
motors



3  
motori  
motors


		EXWP125 EXWI125	EXWP220 EXWI220	EXWP250 EXWI250	EXWP330 EXWI330	EXWP375 EXWI375
Numero motori	Number motors	1	2	2	3	3
Stadi motori	Stage	double	double	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass	by pass	by pass
P max (W)	P max (W)	1400	2400	2600	3300	3600
Potenza (W)	P (W)	1200	2050	2300	2900	3150
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2250	2400	2250	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	340	430	510	645
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	65	67	67	68	68
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76	77/76	77/76	77/76	77/76
Peso (Kg)	Weight (Kg)	19,0/21,0	21,2/23,0	21,2/23,0	23,0/25,0	23,0/25,0



## Accessori/Accessories STANDARD


Kit: KITW040

Description	Code	Q.ty
1 Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	1 pz
2 Crevice tool Ø40	<b>ACLP040</b>	1 pz
3 Chrome extension wand Ø40	<b>ACTC038D</b>	1 pz
4 Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	1 pz
5 Nozzle body A/P L400 Ø40	<b>ACCS400A/P</b>	2 pz
6 Slide-on for liquids nozzle L400	<b>ACIL400</b>	1 pz
7 Slide-on brush for floor nozzle L400	<b>ACIP400</b>	1 pz
8 Dusting brush Ø40	<b>ACPE040</b>	1 pz

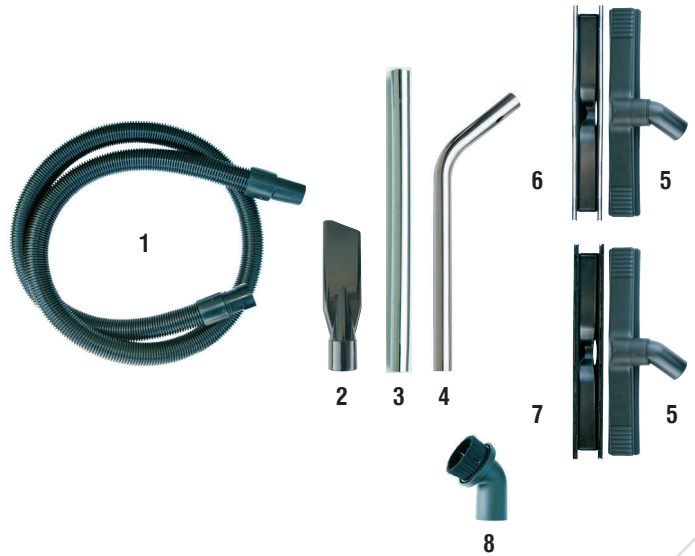

## Filtri e optional/Filters and options

Description	Code	note
9 Polyester filter with ring Ø44	<b>FA044P</b>	standard
10 Paper bag 77lt Max 2mot	<b>FI005C</b>	optional
11 Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
12 Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
13 Sponge filter for liquids	<b>ACCA165A</b>	standard
14 Drainage kit Ø28	<b>ACKI028</b>	optional
15 Nylon filter Ø440	<b>FINY440AT</b>	optional
16 Slide-on for carpet nozzle L400	<b>ACIT400</b>	optional

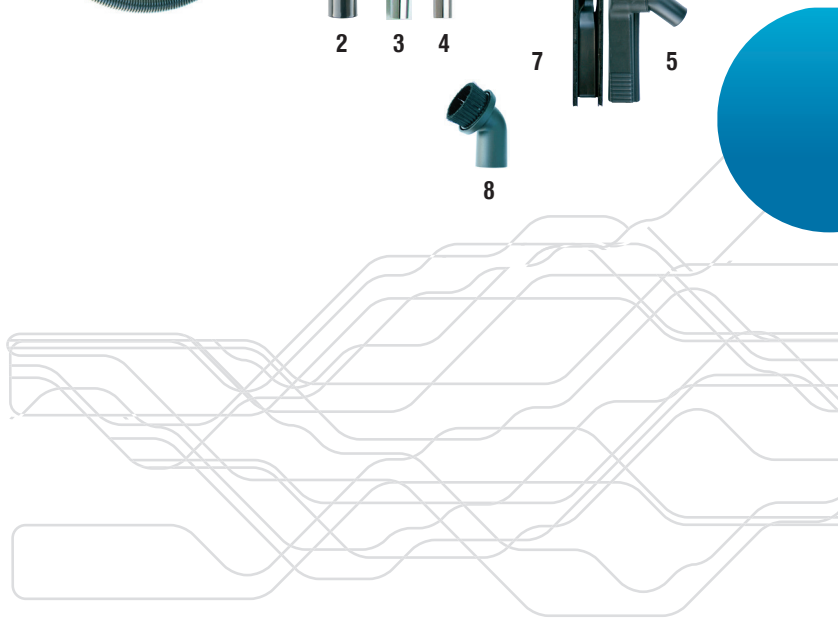

9



10



11



12



13



14



15



16



UNI EN ISO  
9001:2008



# exel M

Aspirapolvere e liquidi. Disponibile con uno, due o tre motori bistadio fino ad una potenza massima di 3600W, con fusto in polipropilene o inox da 76lt di capacità e manico per facilitare la manovrabilità. Ideale per la pulizia professionale.

Wet&Dry Vacuum Cleaner with one, two or three double stage motors, Reaching 3600W maximum power and provided with a practical handle. Available with stainless steel or polypropylene 76 litres tank, this model is ideal for professional cleaning.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



D polvere  
D dry



W acqua  
W wet



1  
motore  
motor




2  
motori  
motors



3  
motori  
motors


		EXWP125M EXWI125M	EXWP220M EXWI220M	EXWP250M EXWI250M	EXWP330M EXWI330M	EXWP375M EXWI375M
Numero motori	Number motors	1	2	2	3	3
Stadi motori	Stage	double	double	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass	by pass	by pass
P max (W)	P max (W)	1400	2400	2600	3300	3600
Potenza (W)	P (W)	1200	2050	2300	2900	3150
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2250	2400	2250	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	340	430	510	645
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	65	67	67	68	68
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76	77/76	77/76	77/76	77/76
Peso (Kg)	Weight (Kg)	20,0/22,0	22,2/24,0	22,4/24,0	24,0/25,0	24,0/25,0



## Accessori/Accessories STANDARD


Kit: KITW040

Description	Code	Q.ty
1 Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	1 pz
2 Crevice tool Ø40	<b>ACLP040</b>	1 pz
3 Chrome extension wand Ø40	<b>ACTC038D</b>	1 pz
4 Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	1 pz
5 Nozzle body A/P L400 Ø40	<b>ACCS400A/P</b>	2 pz
6 Slide-on for liquids nozzle L400	<b>ACIL400</b>	1 pz
7 Slide-on brush for floor nozzle L400	<b>ACIP400</b>	1 pz
8 Dusting brush Ø40	<b>ACPE040</b>	1 pz

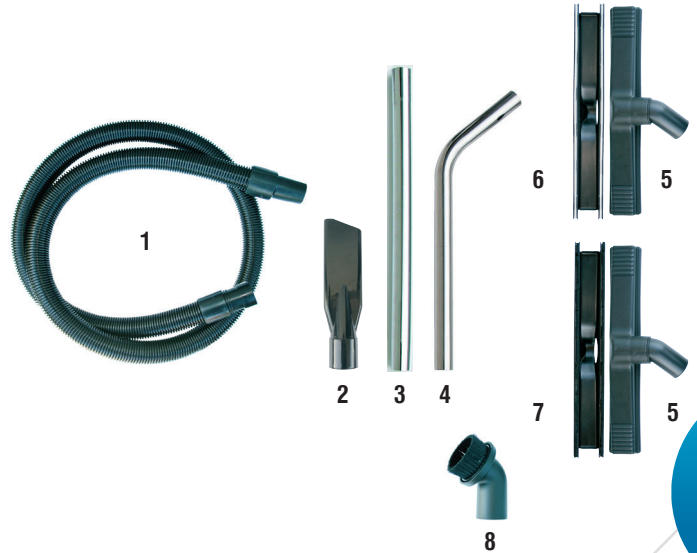

## Filtri e optional/Filters and options

Description	Code	note
9 Polyester filter with ring Ø44	<b>FA044P</b>	standard
10 Paper bag 77lt Max 2mot	<b>FI005C</b>	optional
11 Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
12 Cartridge filter Ø250 - H178	<b>FI250178</b>	optional
13 Sponge filter for liquids	<b>ACCA165A</b>	standard
14 Drainage kit Ø28	<b>ACKI028</b>	optional
15 Nylon filter Ø440	<b>FINY440AT</b>	optional
16 Slide-on for carpet nozzle L400	<b>ACIT400</b>	optional
17 Accessory basket L450 Exel - Bottom	<b>ACCE450E</b>	optional
18 Accessory basket L450 Exel - Top	<b>ACCE450ES</b>	optional

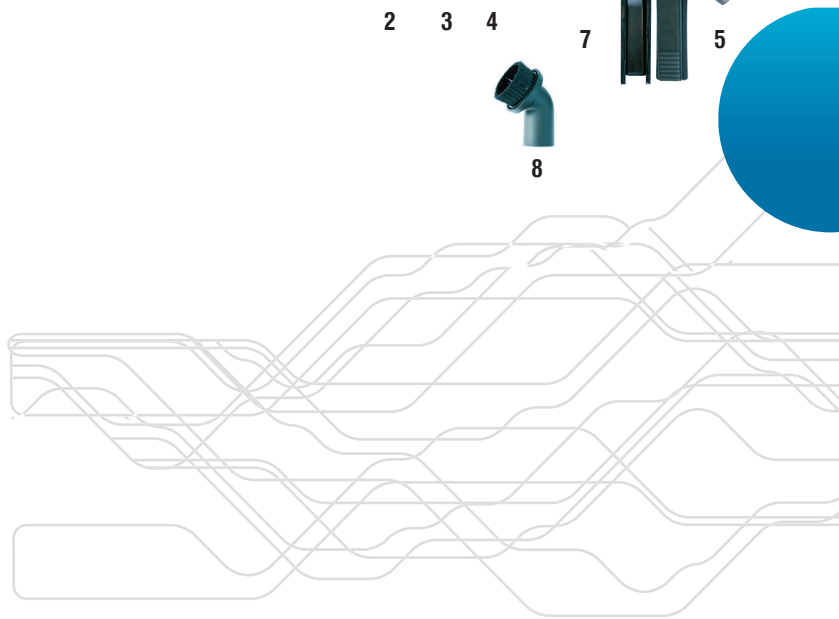

9



10



11



12



13




14




15



16



17



18



# verso

Aspirapolvere e liquidi con uno, due o tre motori bistadio fino ad una potenza massima di 3600W, con fusto in polipropilene o inox da 76lt di capacità. Ideale per la pulizia professionale con l'aggiunta del carrello basculante e del manico per facilitare lo svuotamento.

Wet&Dry Vacuum Cleaner with one, two or three double stage motors till reaching 3600W maximum power. Provided with tipping trolley for an easy emptying of dirty liquids this model is ideal for professional cleaning. Available with stainless steel or polypropylene 76 litres tank cleaning.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



D polvere  
D dry



W acqua  
W wet



1  
motore  
motor




2  
motori  
motors



3  
motori  
motors

		VEWP125 VEWI125	VEWP220 VEWI220	VEWP250 VEWI250	VEWP330 VEWI330	VEWP375 VEWI375
Numero motori	Number motors	1	2	2	3	3
Stadi motori	Stage	double	double	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass	by pass	by pass
P max (W)	P max (W)	1400	2400	2600	3300	3600
Potenza (W)	P (W)	1200	2050	2300	2900	3150
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2250	2400	2250	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	340	430	510	645
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	65	67	67	68	68
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76	77/76	77/76	77/76	77/76
Peso (Kg)	Weight (Kg)	23,0/25,0	25,0/27,0	25,0/27,0	27,1/29,0	27,1/29,0



## Accessori/Accessories STANDARD Kit: KITW040

Description	Code	Q.ty
1 Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	1 pz
2 Crevice tool Ø40	<b>ACLPO40</b>	1 pz
3 Chrome extension wand Ø40	<b>ACTC038D</b>	1 pz
4 Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	1 pz
5 Nozzle body A/P L400 Ø40	<b>ACCS400A/P</b>	2 pz
6 Slide-on for liquids nozzle L400	<b>ACIL400</b>	1 pz
7 Slide-on brush for floor nozzle L400	<b>ACIP400</b>	1 pz
8 Dusting brush Ø40	<b>ACPE040</b>	1 pz



## Filtri e optional/Filters and options

Description	Code	note
9 Polyester filter with ring Ø44	<b>FA044P</b>	standard
10 Paper bag 77lt Max 2mot	<b>FI005C</b>	optional
11 Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
12 Cartridge filter Ø250 - H178	<b>FI250178</b>	optional
13 Sponge filter for liquids	<b>ACCA165A</b>	standard
14 Drainage kit Ø28	<b>ACKI028</b>	optional
15 Nylon filter Ø440	<b>FINY440AT</b>	optional
16 Slide-on for carpet nozzle L400	<b>ACIT400</b>	optional
17 Accessory basket L450 Verso - Bottom	<b>ACCE450V</b>	optional
18 Accessory basket L450 Verso - Top	<b>ACCE450VS</b>	optional
19 Complete squeegee tool	<b>ACVF060/C</b>	optional
20 S/Steel Spacer with holes Ø440 250mm	<b>CMDI4402F/C</b>	optional
21 Complete squeegee tool with foot bracket	<b>ACVF060P/C</b>	optional



9



10



11



12



13



14



15



21




15



16



17



18



19



20



# eject

Aspiraliquidi con due motori bistadio ed una pompa immersa integrata all'interno del fusto da 76lt. Creato per esigenze di aspirazione di liquidi su ampie superfici ed espulsione a distanza. Ideale per risolvere pulizie di cantine, sanificazione fondi di cisterne e problemi di allagamenti in genere.

Wet Vacuum Cleaner provided with two double stage motors and a fully integrated submersible pump inside a 76 litres tank and tipping trolley. Studied for the suction of liquids and distance ejection, this model is fit for cellar cleaning, emptying of cisterns and drainage of any kind of flooding.



fusto acciaio inox  
stainless steel tank




2  
motori  
motors



W acqua  
W wet

## EJWI220


Numero motori	Number motors	2
Stadi motori	Stage	double
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	by pass
P max (W)	P max (W)	2400
Potenza (W)	P (W)	2050
Portata pompa (lt/min)	Capacity pump (lt/min)	125
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2250
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	340
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	67
Capacità tot. fusto (lt)	Total tank capacity (lt)	76
Peso (Kg)	Weight (Kg)	28,0



## Accessori/Accessories STANDARD



Kit: KITEJ040

Description	Code	Q.ty
1 Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	1 pz
2 Chrome extension wand Ø40	<b>ACTC038D</b>	1 pz
3 Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	1 pz
4 Nozzle body A/P L400 Ø40	<b>ACCS400A/P</b>	1 pz
5 Slide-on for liquids nozzle L400	<b>ACIL400</b>	1 pz
6 Accessory basket L450 Verso - Bottom	<b>ACCE450V</b>	1 pz



## Filtri e optional/Filters and options

Description	Code	note
7 Crevice tool Ø40	<b>ACLP040</b>	optional
8 Dustin brush Ø40	<b>ACPE040</b>	optional
9 Slide-on brush for floor nozzle L400	<b>ACIP400</b>	optional
10 Polyester filter with ring/with basket Ø44	<b>FA044P/C</b>	optional
11 Paper bag 77lt Max 2mot	<b>FI005C</b>	optional
12 Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
13 Cartridge filter Ø250 - H 178	<b>FI250178</b>	optional
14 Sponge filter for liquids	<b>ACCA165A</b>	standard
15 Drainage kit Ø28	<b>ACKI028</b>	optional
16 Nylon filter Ø440	<b>FINY440AT</b>	optional
17 Slide-on for carpet nozzle L400	<b>ACIT400</b>	optional
18 Complete squeegee tool	<b>ACVF060/C</b>	optional
19 Dirty water basket for Eject	<b>CMCE077</b>	optional

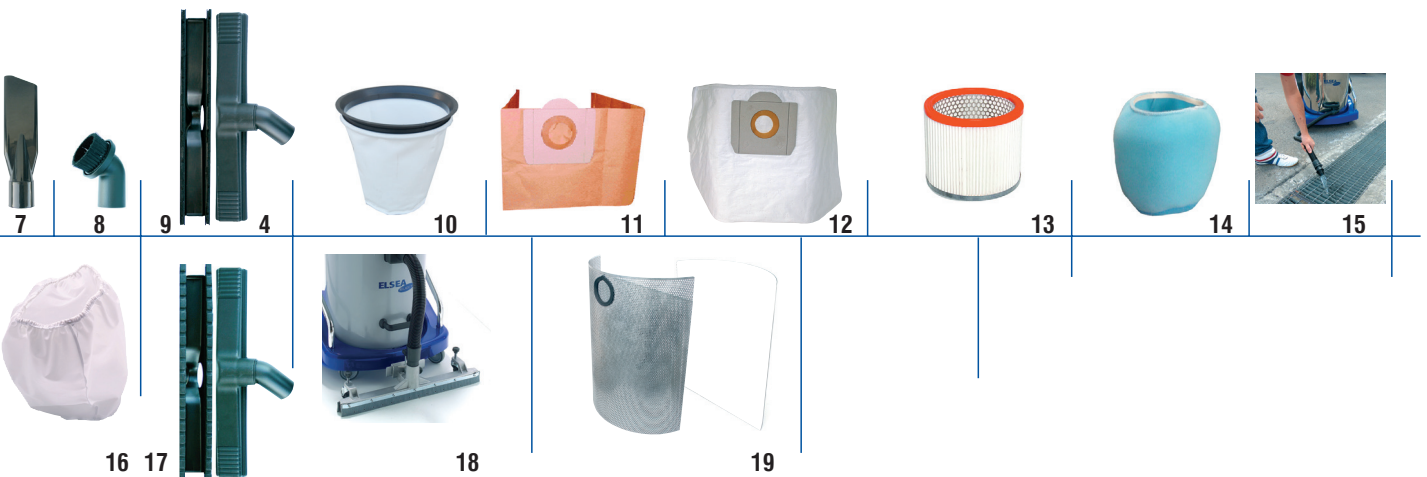



# maximus

MAXIMUS l'aspirazione di materiali particolari quali i trucioli di metallo, residui di legno e vetro, nonché oli, lubrificanti e scarti di produzione meccanica. Il filtro di aspirazione ad elevata superficie filtrante è protetto dall'urto diretto dei materiali per mezzo di una barriera che favorisce l'effetto ciclone.

MAXIMUS allows a comfortable suction of metal swarfs, wood tailings, debris, pieces of glass, exhausted oil, lubricants and any other kind of waste deriving from mechanical manufacturing. The cartridge filter has a high filtration capacity and efficiency. It is protected by a metal cone against direct impact of all kinds of debris creating the so called "cyclone effect".



I fusto acciaio inox  
I stainless steel tank



motori  
motors



D polvere  
D dry






W acqua  
W wet

uso industriale  
industrial use



VEWI375T  
VEWI375TP


Numero motori	Number motors	3
Stadi motori	Stage	double
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	by pass
P max (W)	P max (W)	3600
Potenza (W)	P (W)	3150
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	645
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	68
Capacità tot. fusto (lt)	Total tank capacity (lt)	76
Peso (Kg)	Weight (Kg)	29,8

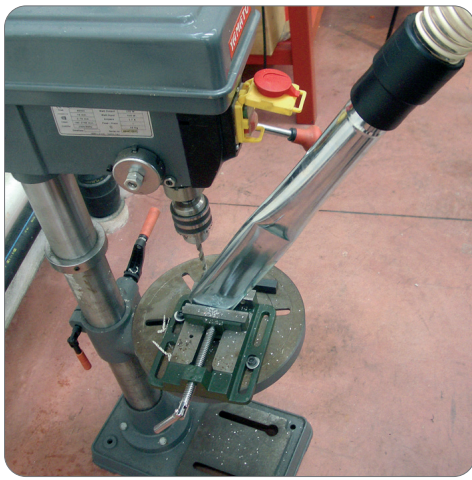

## Accessori/Accessories STANDARD Kit: KITVEWI375T

Description	Code	Q.ty
1 Complete flexible hose mt.2,5 Ø50	<b>ACTF50C</b>	1 pz
2 Crevice tool Ø50	<b>ACLP050</b>	1 pz
3 Chrome curved extension wand Ø50	<b>ACTS050</b>	1 pz
4 Triangle Nozzle Ø50	<b>ACB0050T</b>	1 pz
5 Nozzle body A/P L400 Ø50	<b>ACCS40050DAV</b>	2 pz
6 Slide-on for liquids nozzle L400	<b>ACIL400DAV</b>	1 pz
7 Slide-on brush for floor nozzle L400	<b>ACIP400DAV</b>	1 pz
8 Dusting brush Ø50	<b>ACPE050</b>	1 pz


## Kit STANDARD for VEWI375T

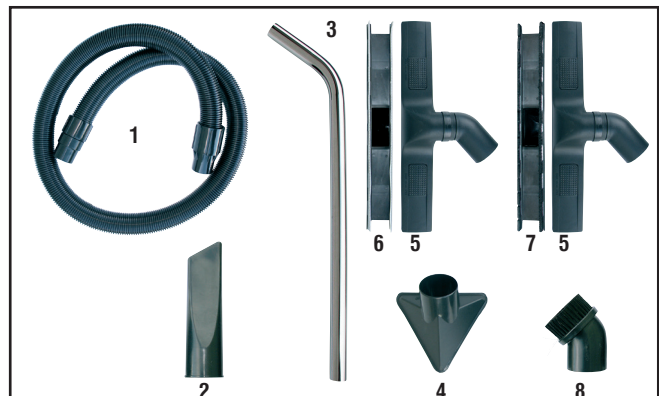

## Accessori/Accessories STANDARD Kit: KITVEWI375TP

Description	Code	Q.ty
9 Antistatic flexible hose complete mt 2,5 Ø50	<b>ACTF50PUC</b>	1 pz
10 Antistatic conic crevice tool Ø50	<b>ACLC050A</b>	1 pz
11 Antistatic corrugated squeegee Ø50	<b>ACVO050A</b>	1 pz
12 Antistatic conic accessory Ø50	<b>ACTC050A</b>	1 pz
13 Zinc plated crevice tool L500mm Ø50	<b>ACLA050Z</b>	1 pz
14 Zinc plated coupling for accessories Ø50	<b>ACMG050Z</b>	1 pz

## Kit STANDARD for VEWI375TP

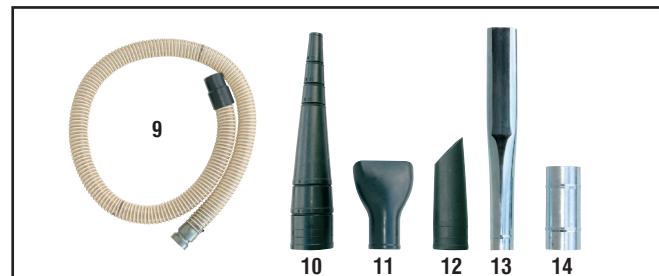

## Filtri e optional/Filters and options

Description	Code	note
15 Shavings/oil separator for Maximus	<b>KITSE440</b>	optional
16 Polyester filter with ring Ø44	<b>FA044P</b>	optional
17 Cartridge filter Ø250 - H178	<b>FI250178</b>	standard
18 Sponge filter for liquids	<b>ACCA165A</b>	standard
19 Accessory basket L450 Verso - Bottom	<b>ACCE450V</b>	optional
20 Cyclon Ø300	<b>CMCI300N</b>	standard
21 Complete squeegee tool	<b>ACVF060/C</b>	optional
22 Complete industrial nozzle L450 Ø50 wet/dry	<b>ACSC450IND</b>	optional



15



16



17



18




19




20



21



22

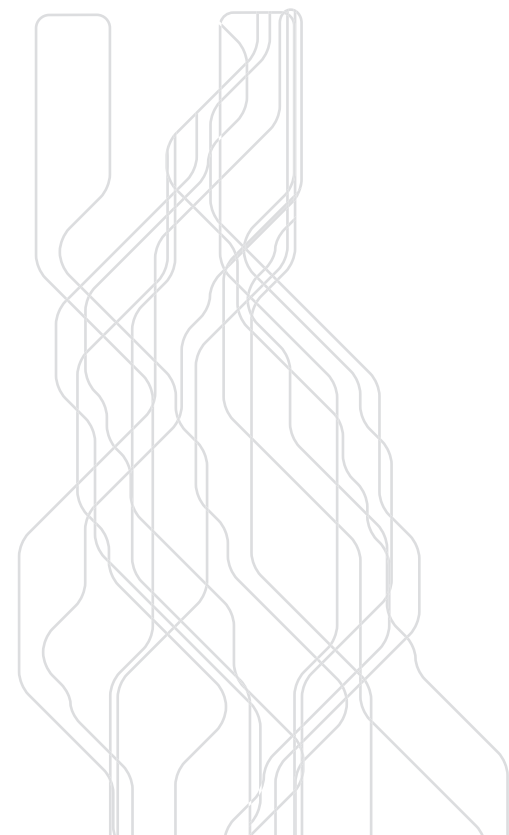



# verso oven ares plus oven

**Verso Oven** due motori e **Ares Plus Oven** un motore sono i modelli tecnicamente studiati per l'aspirazione dei residui lasciati dagli alimenti sui ripiani dei forni elettrici. Il set forno opzionale, il filtro con tessuto per le alte temperature e la bocca di aspirazione in materiale termo-resistente ne consentono l'utilizzo per alcuni istanti in forni accesi. Non idonei all'aspirazione di braci ardenti.

The models **VERSO OVEN** (equipped with two motors) and **ARES PLUS OVEN** (equipped with one motor) are technically studied for suction of residues left by food on shelves of electric ovens. The optional oven set along with the filter with fabric for high temperatures and the heat-resistant suction inlet, allow the use of the machines in the oven on (only for some seconds). Not suitable for suction of burning embers.



fusto acciaio inox  
stainless steel tank



electrostatic  
proof



1  
motore  
motor




2  
motori  
motors




D polvere  
D dry

		ADI125PMF	VEDI220F
Numero motori	Number motors	1	2
Stadi motori	Stage	double	double
Volt (V)	Volt (V)	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass
P max (W)	P max (W)	1400	2400
Potenza (W)	P (W)	1200	2050
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2250
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	340
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	67
Capacità tot. fusto (lt)	Total tank capacity (lt)	37	76
Peso (Kg)	Weight (Kg)	13,7	27,0

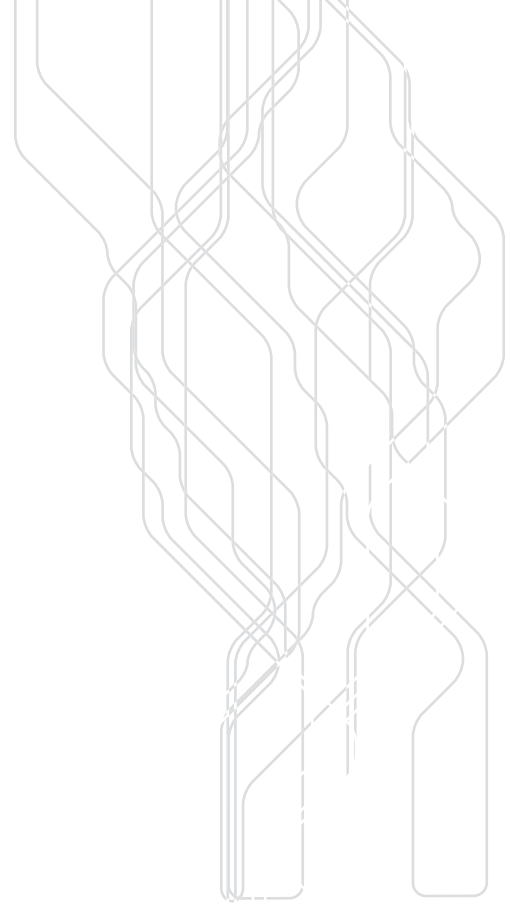

## Filtri e optional/Filters and options

Description	Code	note
1 Filter with fabric for high temperatures with ring Ø44	<b>FA044AT</b>	VEDI220F
2 Filter with fabric for high temperatures with ring Ø34	<b>FA034AT</b>	ADI125PMF
3 Flexible hose in steel and ceramic with couplings Ø36 2,5m	<b>ACTF036M</b>	optional
4 Straight aluminum wand with protection L 1,0 mt	<b>ACTA038DP</b>	optional
5 Straight aluminum wand with half protection L 1,0 mt	<b>ACTA038DS</b>	optional
6 Straight aluminum wand L 1,0 mt	<b>ACTA038DCM</b>	optional
7 Oven brush with teflon L 400 mm	<b>ACCV400FM</b>	optional

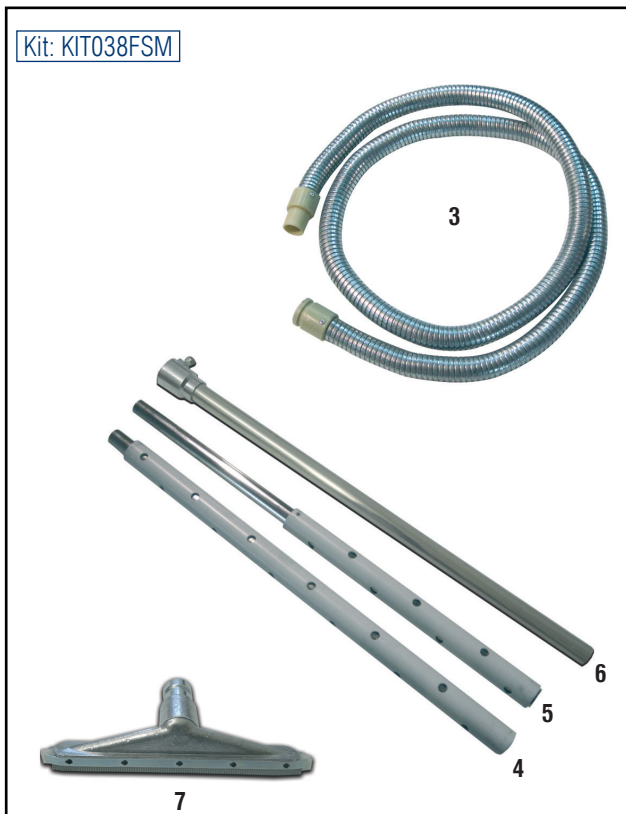

CE  
UNI EN ISO  
9001:2008



# estro 110

Linea lavamoquette nella versione 21/23lt, compatto, maneggevole, leggero con innovativo carrello/ serbatoio. L'unico della gamma estrattori con il kit polvere di serie: consente di aspirare polveri, liquidi oltre che lavorare come lavamoquette, lavapoltrone, lavapavimenti, etc

Extractor with 21/23 litres tank, compact, manageable and light with an innovative trolley/tank. The only one of our range of extractors with the dry kit standard. There are different possible uses: dry cleaning, wet cleaning, extractor, armchairwasher, floorwasher.

V pompa estrattore  
vibrazione  
V solenoid pump



motore  
motor

W acqua  
W wet

D polvere  
D dry

lavamoquette  
clean carpet  
& floor  
vacuum



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank

EWPV11020MT  
EWIV11020MT

Numero motori	Number motors	1
Stadi motori	Stage	double
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	by pass
P max (W)	P max (W)	1250
Potenza (W)	P (W)	1100
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2250
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	21/23
Portata pompa (lt/min)	Capacity pump (lt/min)	0,8
Pressione pompa (bar)	Lift pump (bar)	2
Pompa (W)	Pump (W)	48
Serbatoio detergente (lt)	Detergent tank (lt)	8
Peso (Kg)	Weight (Kg)	16,8/17,9



## Accessori/Accessories STANDARD Kit: KITE036/20

Description	Code	Q.ty
<b>1</b> Complete Hydrolitic flexible hose Ø36 MT	<b>ACTF36C/I</b>	1 pz
<b>2</b> Extractor extension wand Ø37	<b>ACTP037E</b>	2 pz
<b>3</b> Armchair nozzle Ø37	<b>ACBL095PO</b>	1 pz
<b>4</b> Nozzle carpet tool Ø37 MT	<b>ACBL225</b>	1 pz
<b>5</b> Little Nozzle Ø37	<b>ACB0037</b>	1 pz
<b>6</b> Dusting brush Ø37	<b>ACPE037</b>	1 pz
<b>7</b> Crevice tool Ø37	<b>ACLP037</b>	1 pz
<b>8</b> Steel combined nozzle Ø37	<b>ACSP037</b>	1 pz



## Filtri e optional/Filters and optional

Description	Code	note
<b>9</b> Polyester filter with ring Ø34	<b>FA034PP</b>	standard
<b>10</b> Paper bag 20lt	<b>FI003C</b>	optional
<b>11</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>12</b> Anti-Foam Device	<b>CGDA060</b>	standard
<b>13</b> Charging hose Ø18,5mm L 1,5m + funnel	<b>ACTR185C</b>	optional



9



10



11



12



13



CE  
UNI EN ISO  
9001:2008



# estro 125



Linea di estrattori (tappeti, poltrone, pavimenti, ecc.), versione ad un motore con l'innovativo carrello/serbatoio 8lt, con fusto da 36lt in polipropilene o inox. L'utilizzo è sempre associato alla contemporanea erogazione ed aspirazione di detergente (acqua o miscela di acqua e detergente idoneo).

Extractor with a double stage motor it is indicated for the cleaning of carpets, armchairs, moquettes. This model is provided with the very innovative 8 litres detergent tank designed to be assimilated to the trolley and to be completely separated from residual liquids tank. It is available with stainless steel or polypropylene 36 litres tank.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



1  
motore  
motor



W acqua  
W wet




lavamoquette  
clean carpet  
& floor  
vacuum

V pompa estrattore  
vibrazione  
V solenoid pump



EWPV125  
EWIV125

Numero motori	Number motors	1
Stadi motori	Stage	double
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	by pass
P max (W)	P max (W)	1400
Potenza (W)	P (W)	1200
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	37
Portata pompa (lt/min)	Capacity pump (lt/min)	0,8
Pressione pompa (bar)	Lift pump (bar)	2
Pompa (W)	Pump (W)	48
Serbatoio detergente (lt)	Detergent tank (lt)	8
Peso (Kg)	Weight (Kg)	17,6/18,7



## Accessori/Accessories STANDARD

Kit: KITE040

Description	Code	Q.ty
<b>1</b> Flexible hose + Hydrolitic tube complete mt.2,5 Ø40	<b>ACTF038E</b>	1 pz
<b>2</b> Complete armchair nozzle	<b>ACBL100PO/C</b>	1 pz



## Filtri e optional/Filters and options

Description	Code	note
<b>3</b> Polyester filter with ring Ø34	<b>FA034P</b>	optional
<b>4</b> Paper bag 36lt	<b>FI004C</b>	optional
<b>5</b> Polyester bag 36lt	<b>FI004P</b>	optional
<b>6</b> Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
<b>7</b> Nylon filter Ø334	<b>FINY334AT</b>	optional
<b>8</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>9</b> Complete Handle Ø25 Black Tank 36lt	<b>CMMA025/36C</b>	optional
<b>10</b> Complete carpet tool 1 jet	<b>ACLA230/C</b>	optional
<b>11</b> Accessory basket L350 - Bottom	<b>ACCE350</b>	optional
<b>12</b> Anti-Foam Device	<b>CGDA060</b>	standard
<b>13</b> Bag wet/Dry 37 lt	<b>FI5035TNT</b>	optional
<b>14</b> Charging hose Ø18,5mm L 1,5m + funnel	<b>ACTR185C</b>	optional





# estro 250 - 330

Linea di estrattori per tappeti, poltrone, pavimenti, ecc.), versione a due o tre motori con serbatoio 20lt e fusto basculante in polipropilene o inox. L'utilizzo è sempre associato alla contemporanea erogazione ed aspirazione di detergente (acqua o miscela di acqua e detergente idoneo).

Extractor with two or three double stage motors. It is indicated for the cleaning of carpet, armchair, moquette. This model is provided with the 20 litres detergent tank designed to be completely separated from residual liquids tank. It is available with stainless steel or polypropylene 76 litres tank and tipping trolley.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



V pompa estrattore  
vibrazione  
V solenoid pump



R pompa estrattore rotativa  
R peripheral electrical pump



W acqua  
W wet



lavamoquette  
clean carpet  
& floor  
vacuum





motori  
motors



motori  
motors

		EWPV250 EWIV250	EWPR250 EWIR250	EWPV330 EWIV330
Numero motori	Number motors	2	2	3
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	2600	2600	3300
Potenza (W)	P (W)	2300	2300	1900
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2250
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	430	430	510
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	67	67	68
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76	77/76	77/76
Portata pompa (lt/min)	Capacity pump (lt/min)	0,8	1,8	0,8
Pressione pompa (bar)	Lift pump (bar)	2	3,5	2
Pompa (W)	Pump (W)	48	90	48
Serbatoio detergente (lt)	Detergent tank (lt)	20	20	20
Peso (Kg)	Weight (Kg)	25,5/27,5	25,5/27,7	25,9/27,9



## Accessori/Accessories STANDARD

Kit: KITE040


Description	Code	Q.ty
<b>1</b> Flexible hose+ Hydrolitic tube complete mt.2,5 Ø40	<b>ACTF038E</b>	1 pz
<b>2</b> Complete armchair nozzle	<b>ACBL100PO/C</b>	1 pz
<b>2bis</b> Complete armchair nozzle Estro R	<b>ACBL100POER</b>	1 pz



2bis  
(only for **EWPR250**  
and **EWIR250**)

## Filtri e optional/Filters and options

Description	Code	note
<b>3</b> Polyester filter with ring Ø44	<b>FA044P</b>	optional
<b>4</b> Paper bag 77lt	<b>FI005C</b>	optional
<b>5</b> Polyester bag 77lt	<b>FI005P</b>	optional
<b>6</b> Cartridge filter Ø250 - H178	<b>FI250178</b>	optional
<b>7</b> Nylon filter Ø440	<b>FINY440AT</b>	optional
<b>8</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>9</b> Complete carpet tool 1 jet	<b>ACLA230/C</b>	optional
<b>10</b> Accessory basket L450 - Top	<b>ACCE450VS</b>	optional
<b>11</b> Anti-Foam Device	<b>CGDA060</b>	standard
<b>12</b> Drainage kit Ø28	<b>ACKI028</b>	optional
<b>13</b> Bag Wet/Dry 77 lt	<b>FI7050TNT</b>	optional
<b>14</b> Charging hose Ø18,5mm L 1,5m + funnel	<b>ACTR185C</b>	optional





# estro HOTWAVE 250



**HOT WAVE:** Macchina a caldo per iniezione ed estrazione, due motori, serbatoio detergente 20 lt, fusto 77 lt basculante polipropilene o inox.

Ideale per una efficace pulizia ad alta temperatura, regolata da un termostato fino a **90°C**.

**HOT WAVE** Extractor with hot water equipped with 2 double stage motors, 77 lt polypropylene or inox tank with tipping trolley, 20 lt detergent tank. This machine is indicated for an efficient high temperature cleaning, thanks to its **90°C** thermostat.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



V pompa estrattore  
vibrazione  
V solenoid pump



motori  
motors



W acqua  
W wet





lavamoquette  
clean carpet  
& floor  
vacuum

acqua calda  
hot water



**EWPV250H**  
**EWIV250H**

Numero motori	Number motors	2
Stadi motori	Stage	double
Volt (V)	Volt (V)	220-240
Frequenza (Hz)	Frequency (Hz)	50/60
Tipo raffreddamento	Cooling	by pass
P max (W)	P max (W)	3600
Potenza (W)	P (W)	3300
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	430
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	67
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76
Portata pompa (lt/min)	Capacity pump (lt/min)	0,8
Pressione pompa (bar)	Lift pump (bar)	2
Pompa (W)	Pump (W)	48
T max detergente (°C)	T max detergent (°C)	90
Serbatoio detergente (lt)	Detergent tank (lt)	20
Peso (Kg)	Weight (Kg)	26,5/28,5



## Accessori/Accessories STANDARD


Kit: KITE040

Description	Code	Q.ty
<b>1</b> Flexible hose+ Hydrolitic tube complete mt.2,5 Ø40	<b>ACTF038E</b>	1 pz
<b>2</b> Complete armchair nozzle	<b>ACBL100PO/C</b>	1 pz



## Filtri e optional/Filters and options

Description	Code	note
<b>3</b> Polyester filter with ring Ø44	<b>FA044P</b>	optional
<b>4</b> Paper bag 77lt Max 2mot	<b>FI005C</b>	optional
<b>5</b> Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
<b>6</b> Cartridge filter Ø250 - H178	<b>FI250178</b>	optional
<b>7</b> Nylon filter Ø440	<b>FINY440AT</b>	optional
<b>8</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>9</b> Complete carpet tool 1 jet	<b>ACLA230/C</b>	optional
<b>10</b> Accessory basket L450 - Top	<b>ACCE450VS</b>	optional
<b>11</b> Anti-Foam Device	<b>CGDA060</b>	standard
<b>12</b> Drainage kit Ø28	<b>ACKI028</b>	optional
<b>13</b> Charging hose Ø18,5mm L 1,5m + funnel	<b>ACTR185C</b>	optional

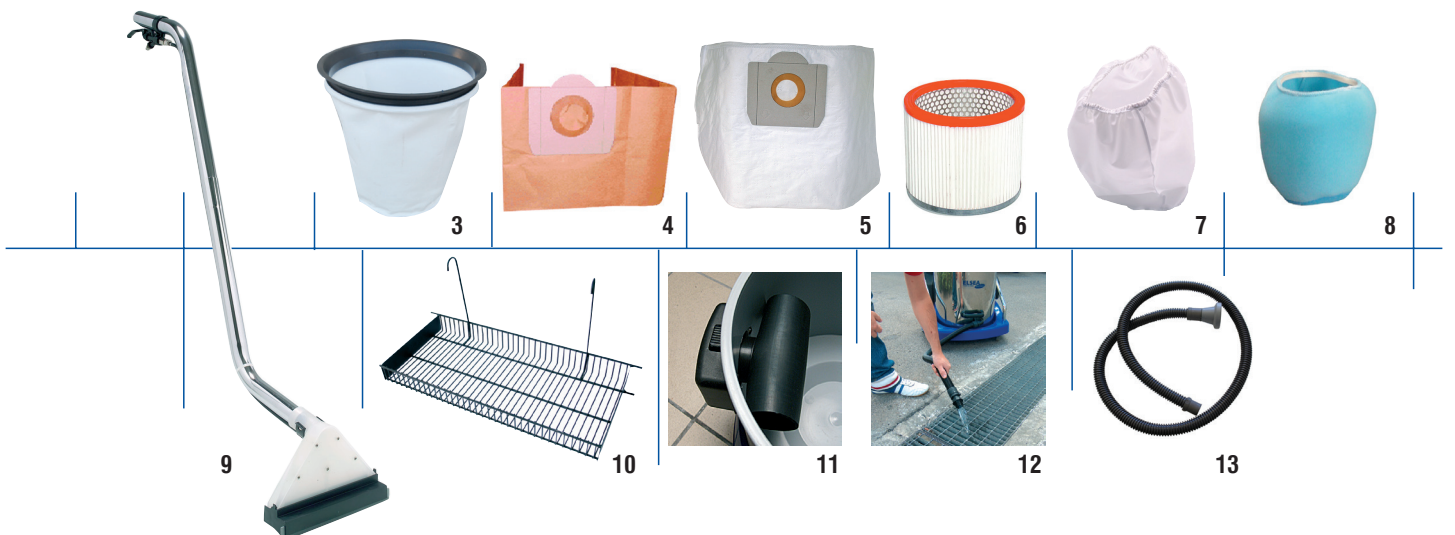

CE  
UNI EN ISO  
9001:2008



# steam wave

**STEAM WAVE** grazie alle sue elevate prestazioni può essere utilizzato per ristoranti, alberghi, macellerie, caseifici, comunità, ecc. oltre che nel domestico, laddove viene richiesta la massima igiene. Può svolgere diverse funzioni grazie ad una vasta gamma di accessori standard. È conforme alle nuove normative di autocontrollo HACCP (DL N.155 del 26/05/97).

**STEAM WAVE** è provvisto di un sistema di ricarica automatica dell'acqua alla caldaia. Il sistema assicura una produzione di vapore illimitata nel tempo.

**STEAM WAVE** has been created mainly for a domestic use, but thanks to its high performance it can be used for restaurants, hotels, butcher shops, communities etc. and all those places where an extremely accurate cleaning is necessary. Thanks to a wide range of accessories it has several functions.

**STEAM WAVE complies with the requirement of the directive HACCP (DL N.155 dtd 26/05/97).**

**STEAM WAVE** is provided with an automatic water reload system of the boiler. Steam production has no time limit.



I fusto acciaio inox  
I stainless steel tank



regolatore  
regulator



motore  
motor



D polvere  
D dry



W acqua  
W wet



lavamoquette  
clean carpet  
& floor  
vacuum



vapore  
steam


## SWP110

Alimentazione	Power	230V-50Hz
Capacità caldaia	Boiler Capacity	2,2 Lt.
Potenza caldaia	Boiler Power	1800 W
Pressione di esercizio	Working Pressure	5 BAR
Temperatura vapore in caldaia	Steam temperature in the boiler	140°
Pmax aspiraliquidi	Pmax vacuum	1250 Watt
Capacità serbatoio inox	Stainless tank capacity	22 Lt.
Capacità serbatoio riserva acqua	Water tank capacity	8,0 Lt.
Peso (Kg)	Weight (Kg)	22 Kg.




## Accessori/Accessories STANDARD

Description	Code	Q.ty
1 Steam hose	<b>ACTV029V</b>	1 pz
2 Terminal steam hose	<b>ACMT036V</b>	1 pz
3 Little brush steam hose	<b>CGDA060</b>	1 pz
4 Steam-Vacuum hose	<b>ACTA036V</b>	1 pz
5 Terminal steam-vacuum hose	<b>ACMT036VA</b>	1 pz
6 Little brush steam-vacuum hose	<b>ACPE010VA</b>	1 pz
7 Steam manual body brush	<b>ACCS150V</b>	1 pz
8 Slide-on for liquids manual nozzle	<b>ACIL150V</b>	1 pz
9 Slide-on brush manual nozzle	<b>ACIP150V</b>	1 pz
10 Crevice tool Ø36	<b>ACLP036</b>	1 pz
11 Dusting brush Ø36	<b>ACPE036</b>	1 pz
12 Little nozzle Ø36	<b>ACB0036</b>	1 pz
13 Radiator brush	<b>ACSP150</b>	1 pz
14 Steam extension wand	<b>ACTP037V</b>	2 pz
15 Steam body nozzle L 300	<b>ACCS300V</b>	1 pz
16 Slide-on brush for floor steam nozzle L 300	<b>ACIP300V</b>	1 pz
17 Slide-on for liquids steam nozzle	<b>ACIL300V</b>	1 pz
18 Slide-on for carpet steam nozzle	<b>ACIT300V</b>	1 pz
19 Armchair steam nozzle	<b>ACBL095POV</b>	1 pz
20 Steam nozzle carpet tool	<b>ACBL225VS</b>	1 pz
21 Sponge filter	<b>ACCA165A</b>	1 pz
22 Polyester filter with ring Ø36	<b>FA034PP</b>	optional
23 Charging hose Ø18,5mm L 1,5m + funnel	<b>ACTR185C</b>	optional

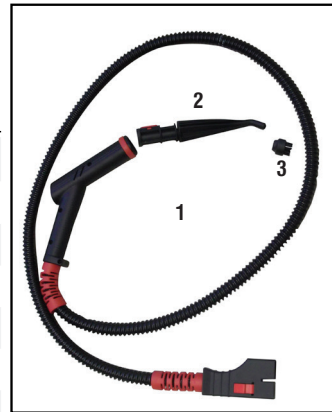

optional

22



optional

23



UNI EN ISO  
9001:2008




# steam plus



**ELSEA STEAM PLUS:** generatore di vapore ideale per la totale sanificazione e pulizia di tutti gli ambienti professionali sottoposti a normativa HACCP (industria alimentare e farmaceutica, strutture sanitarie, centri sportivi ed estetici, hotel e locali pubblici).

Oltre che da una caldaia a ricarica continua da 3000W, la macchina è dotata di un potente aspirapolvere/liquido da 1400W, che consente l'uso di INIEZIONE e ESTRAZIONE con acqua calda/fredda, con o senza detergente, entrambi regolabili, per la detergenza di moquette e tappezzerie e per la pulizia in genere. L'ampia gamma di accessori in dotazione rende **ELSEA STEAM PLUS** un affidabile alleato per la pulizia di tutti i tipi di superficie.

**Steam** generator ideal for a complete cleaning and sanification of all those professional work environments which are subject to HACCP regulations (pharmaceutical and food industry, medical facilities, sport and beauty centers, hotels and public places). Besides a 3000W continuous charging boiler, the machine is also equipped with a 1400W powerful wet & dry vacuum cleaner, that allows the use of the INJECTION/EXTRACTION process (both with adjustable hot/cold water, and with or without detergents as well) for the maintenance of all kind of carpets and upholsteries. Thanks to its wide range of standard accessories, the **ELSEA STEAM PLUS** is a reliable ally for the cleaning treatments of all types of surfaces.

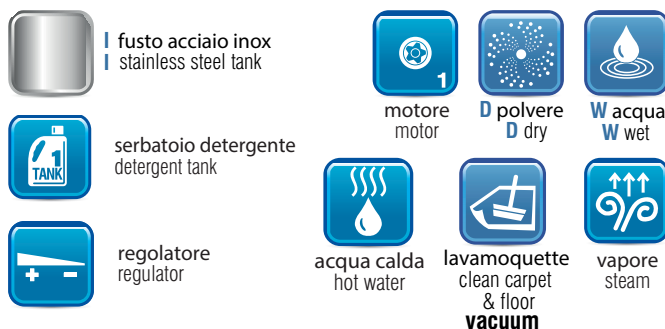




SWI125N

Alimentazione	Power	230V-50Hz
Capacità caldaia	Boiler Capacity	3,5 Lt.
Potenza caldaia	Boiler Power	1500+1500 Watt
Pressione di esercizio	Working Pressure	7 BAR
Temperatura vapore in caldaia	Steam temperature in the boiler	180°
Serbatoio acqua	Water tank	5 Lt.
Serbatoio detergente	Detergent tank	5Lt.
Pmax aspiraliquidi bistadio	Pmax vacuum double stage	1400 Watt
Capacità serbatoio inox	Stainless tank capacity	22 Lt.
Peso (Kg)	Weight (Kg)	45 Kg.



## Accessori/Accessories

Description	Code	Q.ty
1 Steam hose	<b>ACTV029VSP</b>	1 pz
2 Terminal steam hose	<b>ACMT036V</b>	1 pz
3 Little brush steam hose	<b>ACPE010VV</b>	1 pz
4 Steam-Vacuum hose	<b>ACTA036VAPN</b>	1 pz
5 Terminal steam-vacuum hose	<b>ACMT036VA</b>	1 pz
6 Little brush steam-vacuum hose	<b>ACPE010VA</b>	1 pz
7 Steam manual body brush	<b>ACCS150V</b>	1 pz
8 Slide-on for liquids manual nozzle	<b>ACIL150V</b>	1 pz
9 Slide-on brush manual nozzle	<b>ACIP150V</b>	1 pz
10 Crevice tool Ø36	<b>ACLP036</b>	1 pz
11 Dusting brush Ø36	<b>ACPE036</b>	1 pz
12 Little nozzle Ø36	<b>ACBO036</b>	1 pz
13 Radiator brush	<b>ACSP150</b>	1 pz
14 Steam extension wand	<b>ACTP037V</b>	2 pz
15 Steam body nozzle L 300	<b>ACCS300V</b>	1 pz
16 Slide-on brush for floor steam nozzle L 300	<b>ACIP300V</b>	1 pz
17 Slide-on for liquids steam nozzle	<b>ACIL300V</b>	1 pz
18 Slide-on for carpet steam nozzle	<b>ACIT300V</b>	1 pz
19 Armachair steam nozzle	<b>ACBL095POV</b>	1 pz
20 Steam nozzle carpet tool	<b>ACBL225VS</b>	1 pz
21 Sponge filter	<b>ACCA165A</b>	1 pz
22 Polyester filter with ring Ø36	<b>FA034PP</b>	optional
23 Charging hose Ø18,5mm L 1,5m + funnel	<b>ACTR185C</b>	optional

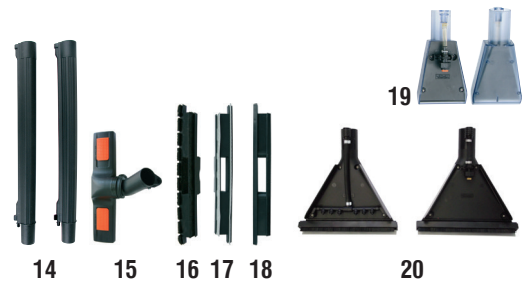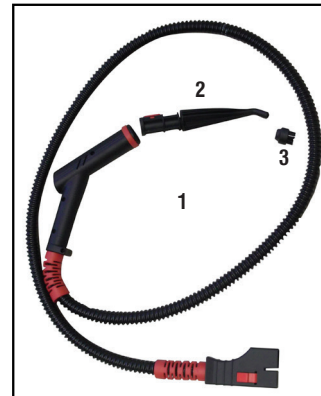

optional

22

optional

23



# elect 125

Ideale per l'utilizzo professionale nella raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspirapolvere.

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



1  
motore  
motor



D polvere  
D dry



W acqua  
W wet

EA per utensile elettrico  
e pneumatico  
EA for electric tool and  
pneumatic tool



		ELWP125A ELWI125A	ELWP125E ELWI125E	ELWP125EA ELWI125EA
Numero motori	Number motors	1	1	1
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	1400	1400	1400
Potenza (W)	P (W)	-	2000	2000
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	215	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	37	37	37
Peso (Kg)	Weight (Kg)	12,7/13,8	12,8/13,9	13,0/14,1




## Accessori/Accessories STANDARD

Description	Code	Q.ty
<b>1</b> Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz

## Filtri e optional/Filters and options

Description	Code	note
<b>2</b> Crevice tool Ø40	<b>ACLP040</b>	optional
<b>3</b> Chrome extension wand Ø40	<b>ACTC038D</b>	optional
<b>4</b> Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
<b>5</b> Nozzle body A/P L300 Ø40	<b>ACCS300A/P</b>	optional
<b>6</b> Slide-on for liquids nozzle L300	<b>ACIL300</b>	optional
<b>7</b> Slide-on brush for floor nozzle L300	<b>ACIP300</b>	optional
<b>8</b> Dusting brush Ø40	<b>ACPE040</b>	optional
<b>9</b> Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
<b>10</b> Polyester filter with ring Ø34	<b>FA034P</b>	standard
<b>11</b> Paper bag 36lt	<b>FI004C</b>	optional
<b>12</b> Polyester bag 36lt	<b>FI004P</b>	optional
<b>13</b> Cartridge filter Ø175 - H140	<b>FI175140</b>	optional
<b>14</b> Nylon filter Ø334	<b>FINY334AT</b>	standard
<b>15</b> Sponge filter for liquids	<b>ACCA165A</b>	standard
<b>16</b> Power head L350	<b>ACES350</b>	optional
<b>17</b> Slide-on for carpet nozzle L300	<b>ACIT300</b>	optional
<b>18</b> Accessory basket L350 - Bottom	<b>ACCE350</b>	optional
<b>19</b> Accessory basket L350 - Top	<b>ACCE350/SUP</b>	optional
<b>20</b> Complete Handle Ø25 Black Tank 36lt	<b>CMMA025/36C</b>	optional
<b>21</b> Flexible with pneumatic hose Ø28 4,5 mt	<b>ACTF028P4,5C</b>	optional

Kit: KITWIO40PL



10



11



12



13



14



15




16



17 5



18



19



20



21

CE  
UNI EN ISO  
9001:2008



# elect 125 M

Ideale per l'utilizzo professionale nella raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspiratore. Adatto all'aspirazione di polveri secche, polveri di legno e comunque polveri pericolose con valori MAK 0,1mg/m<sup>3</sup> (categoria polvere M).

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on. This model is suitable to pick up dry sawdust and hazardous dusts with maximum room concentration values MAK 0,1mg/m<sup>3</sup> (dust class M).



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



motore  
motor



D polvere  
D dry

EA per utensile elettrico  
e pneumatico  
EA for electric tool and  
pneumatic tool



		EMDP125A EMDI125A	EMDP125E EMDI125E	EMDP125EA EMDI125EA
Numero motori	Number motors	1	1	1
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	1400	1400	1400
Potenza (W)	P (W)	-	2000	2000
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	215	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	37	37	37
Peso (Kg)	Weight (Kg)	12,7/13,8	12,8/13,9	13,0/14,1




## Accessori/Accessories STANDARD

Description	Code	Q.ty
<b>1</b> Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz



Kit: KITV040

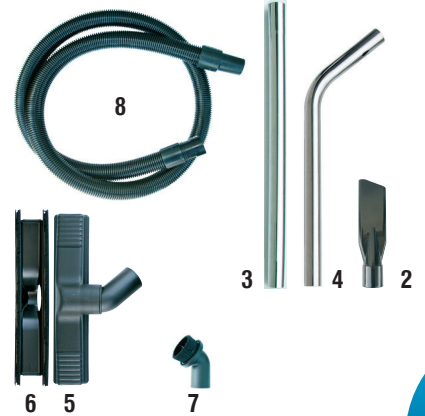

## Filtri e optional/Filters and options


Description	Code	note
<b>2</b> Crevice tool Ø40	<b>ACLP040</b>	optional
<b>3</b> Chrome extension wand Ø40	<b>ACTC038D</b>	optional
<b>4</b> Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
<b>5</b> Nozzle body A/P L300 Ø40	<b>ACCS300A/P</b>	optional
<b>6</b> Slide-on brush for floor nozzle L300	<b>ACIP300</b>	optional
<b>7</b> Dusting brush Ø40	<b>ACPE040</b>	optional
<b>8</b> Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
<b>9</b> Polyester bag 37lt	<b>FI004P</b>	standard
<b>10</b> Conic hepa cartridge filter Ø202 - H153	<b>FI202153HP</b>	standard
<b>11</b> Accessory basket L350 - Bottom	<b>ACCE350</b>	optional
<b>12</b> Accessory basket L350 - Top	<b>ACCE350/SUP</b>	optional
<b>13</b> Complete Handle Ø25 Black Tank 36lt	<b>CMMA025/36C</b>	optional
<b>14</b> Flexible with pneumatic hose Ø28 4,5 mt	<b>ACTF028P4,5C</b>	optional




9



10



11



12



13



14



CE  
UNI EN ISO  
9001:2008



# elect 125 H

Ideale per l'utilizzo professionale nella raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspiratore. Adatto all'aspirazione di tutte le piccole particelle di polvere, incluse quelle cancerogene e patogene (categoria polvere H).

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on. This model is suitable to pick up all small dust particles including carcinogens and pathogens (dust class H).



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



motore  
motor



D polvere  
D dry

EA per utensile elettrico  
e pneumatico  
EA for electric tool and  
pneumatic tool




		EHDP125A EHD125A	EHDP125E EHD125E	EHDP125EA EHD125EA
Numero motori	Number motors	1	1	1
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	1400	1400	1400
Potenza (W)	P (W)	1200	1200	1200
P max utensile (W)	P max tool (W)	-	2000	2000
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	215	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	37	37	37
Peso (Kg)	Weight (Kg)	12,7/13,8	12,8/13,9	13,0/14,1



## Accessori/Accessories STANDARD

Description	Code	Q.ty
1 Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz



## Filtri e optional/Filters and options

Description	Code	note
2 Crevice tool Ø40	<b>ACLP040</b>	optional
3 Chrome extension wand Ø40	<b>ACTC038D</b>	optional
4 Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
5 Nozzle body A/P L300 Ø40	<b>ACCS300A/P</b>	optional
6 Slide-on brush for floor nozzle L300	<b>ACIP300</b>	optional
7 Dusting brush Ø40	<b>ACPE040</b>	optional
8 Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
9 Polyester bag 37lt	<b>FI004P</b>	standard
10 Conic hepa cartridge filter Ø202 - H153	<b>FI202153HP</b>	standard
11 Polyester filter with ring Ø34	<b>FA034P</b>	standard
12 Accessory basket L350 - Bottom	<b>ACCE350</b>	optional
13 Accessory basket L350 - Top	<b>ACCE350/SUP</b>	optional
14 Complete Handle Ø25 Black Tank 36lt	<b>CMMA025/36C</b>	optional
15 Flexible with pneumatic hose Ø28 4,5 mt	<b>ACTF028P4,5C</b>	optional




9




10



11



12



13




14



15

Kit: KITV040

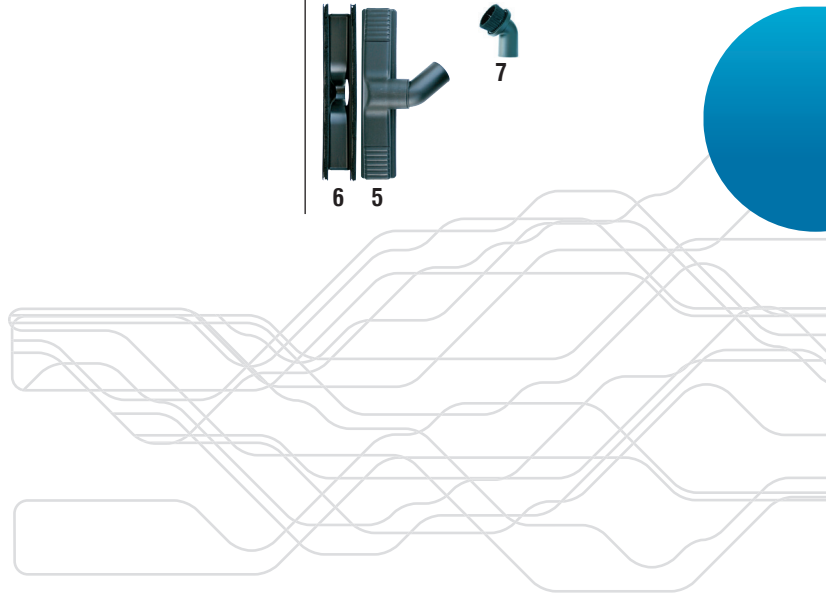



UNI EN ISO  
9001:2008



# elect 250 N

Ideale per l'utilizzo professionale della raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspirapolvere.

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switch the vacuum cleaner on when the tool is on.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



2  
motori  
motors



D polvere  
D dry




W acqua  
W wet

EA per utensile elettrico  
e pneumatico  
EA for electric tool and  
pneumatic tool



		ELWN250A ELWIN250A	ELWPN250E ELWIN250E	ELWN250EA ELWN250EA
Numero motori	Number motors	2	2	2
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	2600	2600	2600
Potenza (W)	P (W)	2300	2300	2300
P max utensile (W)	P max tool (W)	-	1200	1200
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	430	430	430
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	67	67	67
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76	77/76	77/76
Peso (Kg)	Weight (Kg)	21,3/23,1	21,5/23,3	21,7/23,5



## Accessori/Accessories STANDARD

Description	Code	Q.ty
1 Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz

## Filtri e optional/Filters and options

Description	Code	note
2 Crevice tool Ø40	<b>ACLP040</b>	optional
3 Chrome extension wand Ø40	<b>ACTC038D</b>	optional
4 Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
5 Nozzle body A/P L400 Ø40	<b>ACCS400A/P</b>	optional
6 Slide-on for liquids nozzle L400	<b>ACIL400</b>	optional
7 Slide-on brush for floor nozzle L400	<b>ACIP400</b>	optional
8 Dusting brush Ø40	<b>ACPE040</b>	optional
9 Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
10 Polyester filter with ring Ø44	<b>FA044P</b>	standard
11 Paper bag 77lt Max 2mot	<b>FI005C</b>	optional
12 Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
13 Cartridge filter Ø250 - H178	<b>FI250178</b>	optional
14 Nylon filter Ø440	<b>FINY440AT</b>	standard
15 Sponge filter for liquids	<b>ACCA165A</b>	standard
16 Slide-on for carpet nozzle L400	<b>ACIT400</b>	optional
17 Accessory basket L450 Exel - Bottom	<b>ACCE450E</b>	optional
18 Accessory basket L450 Exel - Top	<b>ACCE450ES</b>	optional
19 Exel black handle Ø25 - Complete	<b>CMMA025EX/C</b>	optional
20 Flexible with pneumatic hose Ø28 - 4,5 mt	<b>ACTF028P4,5C</b>	optional
21 Y Coupling inlet	<b>ACMD040N</b>	optional

Kit: KITW040



10



11



12



13



14




15




16

5



17



18



19



20



21



UNI EN ISO  
9001:2008



# elect 250 B

Ideale per l'utilizzo professionale per la raccolta di residui di lavorazione in concomitanza ad un utensile elettrico o pneumatico. Di facile utilizzo e praticità grazie ad un dispositivo elettronico che avvia automaticamente l'aspirapolvere. Versione con carrello e fusto basculante.

This model has been studied to be used together with an electric or pneumatic tool for the professional suction of tailings. Practical and easy to use thanks to the simple use of a device which automatically switches the vacuum cleaner on when the tool is on. Provided with tipping trolley.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



2  
motori  
motors



D polvere  
D dry



W acqua  
W wet

EA per utensile elettrico  
e pneumatico  
EA for electric tool and  
pneumatic tool



		ELWPB250A ELWIB250A	ELWPB250E ELWIB250E	ELWPB250EA ELWIB250EA
Numero motori	Number motors	2	2	2
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	2600	2600	2600
Potenza (W)	P (W)	2300	2300	2300
P max utensile (W)	P max tool (W)	-	1200	1200
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	430	430	430
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	67	67	67
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76	77/76	77/76
Peso (Kg)	Weight (Kg)	25,5/27,5	25,7/27,7	25,9/27,9




## Accessori/Accessories STANDARD

Description	Code	Q.ty
1 Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz

## Filtri e optional/Filters and options

Description	Code	note
2 Crevice tool Ø40	<b>ACLP040</b>	optional
3 Chrome extension wand Ø40	<b>ACTC038D</b>	optional
4 Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
5 Nozzle body A/P L400 Ø40	<b>ACCS400A/P</b>	optional
6 Slide-on for liquids nozzle L400	<b>ACIL400</b>	optional
7 Slide-on brush for floor nozzle L400	<b>ACIP400</b>	optional
8 Dusting brush Ø40	<b>ACPE040</b>	optional
9 Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
10 Polyester filter with ring Ø44	<b>FA044P</b>	standard
11 Paper bag 77lt Max 2mot	<b>FI005C</b>	optional
12 Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
13 Cartridge filter Ø250 - H178	<b>FI250178</b>	optional
14 Nylon filter Ø440	<b>FINY440AT</b>	standard
15 Sponge filter for liquids	<b>ACCA165A</b>	standard
16 Slide-on for carpet nozzle L400	<b>ACIT400</b>	optional
17 Accessory basket L450 Verso - Bottom	<b>ACCE450V</b>	optional
18 Accessory basket L450 Verso - Top	<b>ACCE450VS</b>	optional
19 Flexible with pneumatic hose Ø28 - 4,5 mt	<b>ACTF028P4,5C</b>	optional
20 Y Coupling inlet Ø40	<b>ACMD040N</b>	optional

Kit: KITW040

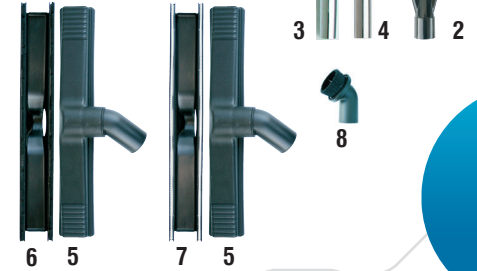

10



11



12



13



14




15




16

5



17



18



19



20



CE  
UNI EN ISO  
9001:2008



# vibra 125

VIBRA: idoneo all'aspirazione di residui di lavorazione generati da utensili elettrici o pneumatici. È dotato di un microprocessore che consente l'avviamento e lo stop automatico dell'aspirazione; anche la pulizia del filtro è automatica grazie all'Intelligent cleaning filter. Una coppia di vibratori elettromeccanici si attiva solo quando il filtro è sporco.

The VIBRA model is fit to be used together with an electric or pneumatic tool for a professional suction of tailings. This model has been endowed with a microprocessor that allows the automatic start and stop of the suction. Thanks to the Intelligent cleaning filter, this model grants an automatic cleaning of the filter. A couple of electromechanical vibrators starts up only in case of dirty filter.



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



E per utensile elettrico  
A per utensile pneumatico  
E for electric tool  
A for pneumatic tool



1  
motore  
motor



D polvere  
D dry



filto  
autopulente  
intelligent  
cleaning filter

VIDP125AU    VIDP125EU    VIDP125EAU  
VIDI125AU    VIDI125EU    VIDI125EAU

Numero motori	Number motors	1	1	1
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	1400	1400	1400
Potenza (W)	P (W)	1200	1200	1200
P max utensile (W)	P max tool (W)	-	2000	2000
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	215	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	37	37	37
Peso (Kg)	Weight (Kg)	12,7/13,8	12,8/13,9	13,0/14,1




## Accessori/Accessories STANDARD

Description	Code	Q.ty
<b>1</b> Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz

## Filtri e optional/Filters and options

Description	Code	note
<b>2</b> Crevice tool Ø40	<b>ACLP040</b>	optional
<b>3</b> Chrome extension wand Ø40	<b>ACTC038D</b>	optional
<b>4</b> Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
<b>5</b> Nozzle body A/P L300 Ø40	<b>ACCS300A/P</b>	optional
<b>6</b> Slide-on brush for floor nozzle L300	<b>ACIP300</b>	optional
<b>7</b> Dusting brush Ø40	<b>ACPE040</b>	optional
<b>8</b> Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
<b>9</b> Polyester filter with ring Ø34	<b>FA034P</b>	optional
<b>10</b> Conic hepa cartridge filter Ø202 - H153	<b>FI202153HP</b>	standard
<b>11</b> Nylon filter Ø334	<b>FINY334AT</b>	optional
<b>12</b> Slide-on for carpet nozzle L300	<b>ACIT300</b>	optional
<b>13</b> Accessory basket L350 Bottom	<b>ACCE350</b>	optional
<b>14</b> Accessory basket L350 Top	<b>ACCE350/SUP</b>	optional
<b>15</b> Complete Handle Ø25 - Black Tank 36lt	<b>CMMA025/36C</b>	optional
<b>16</b> Flexible with pneumatic hose Ø28 - 4,5 mt	<b>ACTF028P4,5C</b>	optional
<b>17</b> Anti-Foam Device	<b>CGDA060</b>	standard

Kit: KITV040

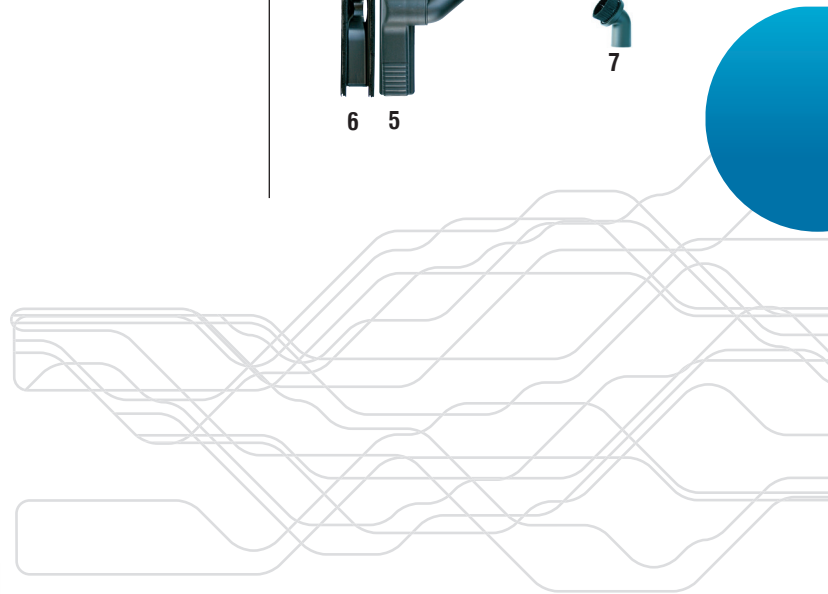


9



10




11



12 5



13



14



15



16




17



18

CE  
UNI EN ISO  
9001:2008

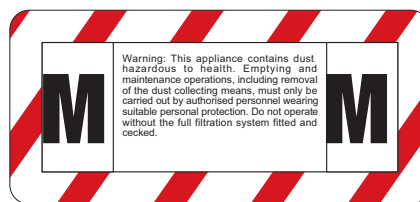

# vibra 125 M

VIBRA: idoneo all'aspirazione di residui di lavorazione generati da utensili elettrici o pneumatici. E' dotato di un microprocessore che consente l'avviamento e lo stop automatico dell'aspirazione; anche la pulizia del filtro è automatica grazie all'Intelligent cleaning filter. Adatto all'aspirazione di polveri secche, polveri di legno e polveri pericolose con valori MAK 0,1mg/m3 (categoria polvere M).

The Vibra model is fit to be used together with an electric or pneumatic tool for professional suction of tailings. This model has been endowed with a microprocessor that allows the automatic start and stop of the suction. Thanks to the intelligent cleaning filter, Vibra grants an automatic cleaning of the filter. This model is suitable to pick up dry sawdust and hazardous dusts with maximum room concentration values MAK 0,1mg/m3 (dust class M).



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



E per utensile elettrico  
A per utensile pneumatico  
E for electric tool  
A for pneumatic tool



1  
motore  
motor



D polvere  
D dry



filto  
autopulente  
intelligent  
cleaning filter

VM DP125A VM DI125A VM DP125E VM DI125E VM DP125EA VM DI125EA

		VM DP125A VM DI125A	VM DP125E VM DI125E	VM DP125EA VM DI125EA
Numero motori	Number motors	1	1	1
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	1400	1400	1400
Potenza (W)	P (W)	1200	1200	1200
P max utensile (W)	P max tool (W)	-	2000	2000
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	215	215	215
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	60	60	60
Capacità tot. fusto (lt)	Total tank capacity (lt)	37	37	37
Peso (Kg)	Weight (Kg)	12,7/13,8	12,8/13,9	13,0/14,1






## Accessori/Accessories STANDARD

Description	Code	Q.ty
<b>1</b> Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz

## Filtri e optional/Filters and options

Description	Code	note
<b>2</b> Crevice tool Ø40	<b>ACLP040</b>	optional
<b>3</b> Chrome extension wand Ø40	<b>ACTC038D</b>	optional
<b>4</b> Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
<b>5</b> Nozzle body A/P L300 Ø40	<b>ACCS300A/P</b>	optional
<b>6</b> Slide-on brush for floor nozzle L300	<b>ACIP300</b>	optional
<b>7</b> Dusting brush Ø40	<b>ACPE040</b>	optional
<b>8</b> Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
<b>9</b> Conic hepa cartridge filter Ø202 - H153	<b>FI202153HP</b>	standard
<b>10</b> Polyester bag 37lt	<b>FI004P</b>	standard
<b>11</b> Accessory basket L350 Bottom	<b>ACCE350</b>	optional
<b>12</b> Accessory basket L350 Top	<b>ACCE350/SUP</b>	optional
<b>13</b> Complete Handle Ø25 - Black Tank 36lt	<b>CMMA025/36C</b>	optional
<b>14</b> Flexible with pneumatic hose Ø28 - 4,5 mt	<b>ACTF028P4,5C</b>	optional

Kit: KITV040

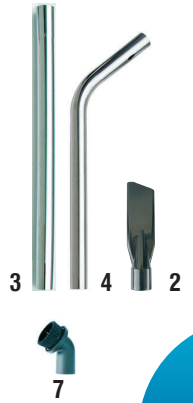



CE  
UNI EN ISO  
9001:2008



# big vibra 250 B



**BIG VIBRA:** idoneo nell'aspirazione di residui di lavorazione generati da utensili elettrici o pneumatici.

È dotato di un microprocessore che consente l'avviamento e lo stop automatico dell'aspirazione; anche la pulizia del filtro è automatica grazie all'Intelligent cleaning filter: un vibratore elettromeccanico si attiva solo quando il filtro è sporco.

The BIG VIBRA model is fit to be used together with an electric or pneumatic tool for a professional suction of tailings. This model has been endowed with a microprocessor that allows the automatic start and stop of the suction. Thanks to the Intelligent cleaning filter this model grant an automatic cleaning of the filter. An electromechanical vibrator starts up only in case of dirty filter.



## bigvibra Kit high-pro



I fusto acciaio inox  
I stainless steel tank



P fusto polipropilene  
P plastic tank



E per utensile elettrico  
A per utensile pneumatico  
E for electric tool  
A for pneumatic tool



motori  
motors



D polvere  
D dry



filtro  
autopulente  
intelligent  
cleaning filter

		VIDP250A VIDI250A	VIDP250E VIDI250E	VIDP250EA VIDI250EA
Numero motori	Number motors	2	2	2
Stadi motori	Stage	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240
Frequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass
P max (W)	P max (W)	2600	2600	2600
Potenza (W)	P (W)	2300	2300	2300
P max utensile (W)	P max tool (W)	-	1200	1200
Pressione min-max (bar)	Pressure min-max (bar)	4-15	-	4-15
Depressione (mm H <sub>2</sub> O)	Waterlift (mm H <sub>2</sub> O)	2400	2400	2400
Aria aspirata (m <sup>3</sup> /h)	Air flow (m <sup>3</sup> /h)	430	430	430
LpA sonoro 3mt(dB(A))	LpA sonorus 3mt(dB(A))	67	67	67
Capacità tot. fusto (lt)	Total tank capacity (lt)	77/76	77/76	77/76
Peso (Kg)	Weight (Kg)	25,5/27,5	25,7/27,7	25,9/27,9




## Accessori/Accessories STANDARD

Description	Code	Q.ty
<b>1</b> Flexible hose 3,3mt Ø28 complete	<b>ACTF028/3,3/C</b>	1 pz

## Filtri e optional/Filters and options

Description	Code	note
<b>2</b> Crevice tool Ø40	<b>ACLP040</b>	optional
<b>3</b> Chrome extension wand Ø40	<b>ACTC038D</b>	optional
<b>4</b> Chrome curved extension wand-male Ø40	<b>ACTC038C</b>	optional
<b>5</b> Nozzle body A/P L400 Ø40	<b>ACCS400A/P</b>	optional
<b>6</b> Slide-on brush for floor nozzle L400	<b>ACIP400</b>	optional
<b>7</b> Dusting brush Ø40	<b>ACPE040</b>	optional
<b>8</b> Complete flexible hose mt.2,5 Ø40	<b>ACTF38/2,5/C</b>	optional
<b>9</b> Polyester filter with ring Ø44	<b>FA044P</b>	optional
<b>10</b> Polyester bag 77lt Max 2mot	<b>FI005P</b>	optional
<b>11</b> Polyester Cartridge filter Ø250 - H178	<b>FI250178P</b>	standard
<b>12</b> Flexible with pneumatic hose Ø28 4,5mt.	<b>ACTF028P4,5C</b>	optional
<b>13</b> Y Coupling inlet Ø40	<b>ACMD040N</b>	optional
<b>14</b> Slide-on for carpet nozzle L400	<b>ACIT400</b>	optional
<b>15</b> Accessory basket L450 Verso - Bottom	<b>ACCE450V</b>	optional
<b>16</b> Accessory basket L450 Verso - Top	<b>ACCE450VS</b>	optional

Kit: KITW040B

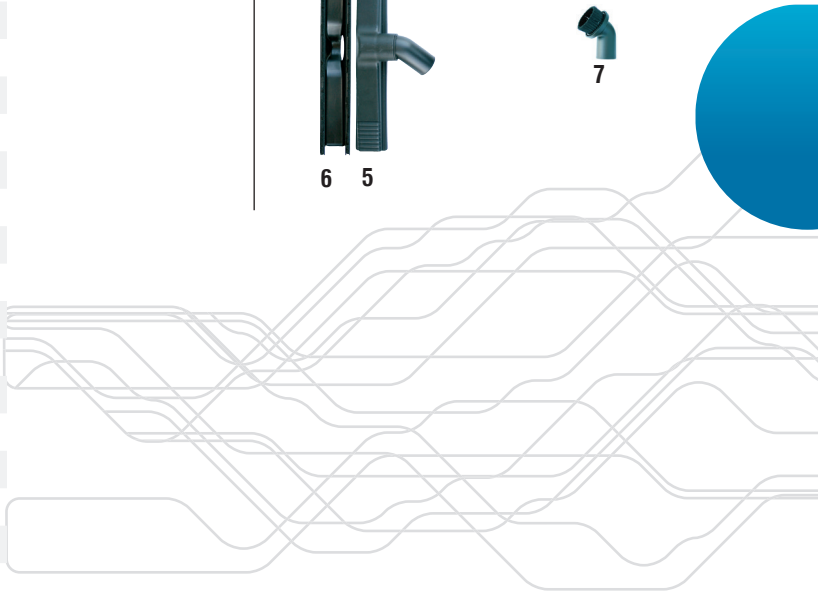

9



10



11



12



13




14

5



15



16



## self service

**SELF SERVICE** è la proposta di aspirazione automatizzata ELSEA. L'affidabilità dei suoi prodotti associata ad una cabina automatizzata garantisce piena autonomia di lavoro con costi di manutenzione e sorveglianza pressoché nulli. La gamma prevede versioni ad aspirazione singola o doppia. Oltre all'aspirapolvere classico, è disponibile il lavamoquette per una pulizia antibatterica accurata.

**SELF SERVICE** is the automated suction proposal of ELSEA. It's products reliability together with an automated engine guarantees a full work range with low maintenance and care costs. The wide range offers both single and double suction products. In addition to the classical vacuum, the carpet cleaner is available, for a careful antibacterial cleaning.



fusto acciaio inox  
stainless steel tank



D polvere  
D dry






W acqua  
W wet



lavamoquette  
clean carpet  
& floor  
vacuum

		vacuum SS1WP220	SS1WP330	carpet SS1WPV250	double vacuum SS2AWP125P	vacuum & carpet SS2AWP125WWPV125
Numero motori	Number motors	2	3	2	1+1	1+1
Stadi motori	Stage	double	double	double	double	double
Volt (V)	Volt (V)	220-240	220-240	220-240	220-240	220-240
Fequenza (Hz)	Frequency (Hz)	50/60	50/60	50/60	50/60	50/60
Tipo raffreddamento	Cooling	by pass	by pass	by pass	by pass	by pass
P max (W)	P max (W)	2400	3300	2600	1400+1400	1400+1400
Materiale fusto	Tank material	Polipropilene	Polipropilene	Polipropilene	Polipropilene	Polipropilene
Serbatoio detergente (lt)	Dergent tank (lt)	-	-	30	-	20
Capacità tot. fusto (lt)	Total tank capacity (lt)	77	77	77	37+37	37+37
Pompa (W)	Pump (W)	-	-	48	-	48

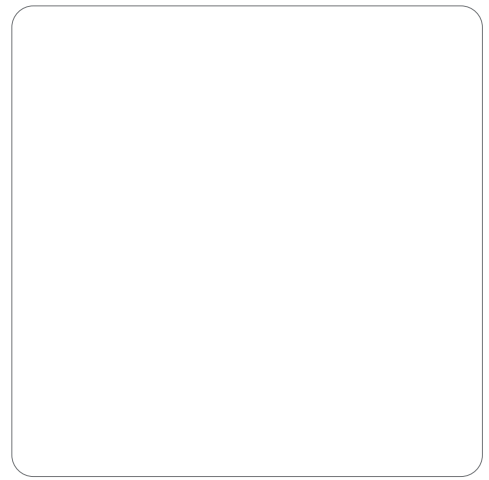

## Accessori/Accessories

Description	Code	Q.ty
1 Flexible hose + hydrolitic tube mt 5 Ø40	<b>ACTF038E5</b>	1 pz
2 Complete armchair nozzle	<b>ACBL100PO/C</b>	1 pz
3 Complete flexible hose mt 5 Ø40	<b>ACTF385CSS</b>	1 pz
4 Crevice tool Ø40	<b>ACLP040</b>	1 pz
5 Dusting brush Ø40	<b>ACPE040</b>	1 pz



## Filtri e optional /Filters and options

Description	Code	note
6 Anti foam device	<b>CGDA060</b>	STANDARD in carpet cleaner
7 Sponger filter for liquids	<b>ACCA165A</b>	STANDARD
8 Polyester filter with ring (Ø34 - Ø44)	<b>FA034P/FA044P</b>	optional
9 Paper bag (37lt - 77lt) max 2 motors	<b>FI004C/FI005C</b>	optional
10 Polyester bag 37lt - (77lt max 2 motors)	<b>FI004P/FI005P</b>	optional
11 Drainage kit Ø28	<b>ACKI028</b>	optional



6



7



8



9



10



11

# linea CF

# carrello metallo

metal trolley range



ares  
CF

ares  
PLUS-CF

exel  
CF

exel  
M-CF



<b>ARES CF</b>	<b>ARES PLUS CF</b>	<b>VERSO CF</b>	<b>MAXIMUS</b>	<b>EXEL CF</b>	<b>EXEL M-CF</b>
AFWI110	AFWI110P	VFWI125	VFWI375T	EFWI125	EFWP125M
AFWI125	AFWI125P	VFWI220	VFWI375TP	EFWI220	EFWP220M
		VFWI250		EFWI250	EFWP250M
		VFWI330		EFWI330	EFWP330M
		VFWI375		EFWI375	EFWP375M



verso  
CF

maximus  
CF



**ARES CF**

AFWP110  
AFWP125

**ARES PLUS CF**

AFWP110P  
AFWP125P

**VERSO CF**

VFWP125  
VFWP220  
VFWP250  
VFWP330  
VFWP375

**EXEL CF**

EFWP125  
EFWP220  
EFWP250  
EFWP330  
EFWP375

**EXEL M-CF**

EFWP125M  
EFWP220M  
EFWP250M  
EFWP330M  
EFWP375M

# misure confezioni

## packing measures



esat

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm



ares  
dry

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm



quiet

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm



bio

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm



exel

Larghezza / Width:  
58 cm  
Altezza / Height:  
96 cm  
Profondità / Depth:  
58 cm



verso

Larghezza / Width:  
59 cm  
Altezza / Height:  
106 cm  
Profondità / Depth:  
60 cm



eject

Larghezza / Width:  
59 cm  
Altezza / Height:  
106 cm  
Profondità / Depth:  
60 cm

ares  
white  
rooms

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm

quiet junior

Larghezza / Width:  
41 cm  
Altezza / Height:  
52 cm  
Profondità / Depth:  
39 cm

mini  
beat

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm



exel  
M

Larghezza / Width:  
58 cm  
Altezza / Height:  
96 cm  
Profondità / Depth:  
58 cm



verso  
oven

Larghezza / Width:  
59 cm  
Altezza / Height:  
106 cm  
Profondità / Depth:  
60 cm

ares  
wet&dry

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm

green line

Larghezza / Width:  
41 cm  
Altezza / Height:  
59 cm  
Profondità / Depth:  
41 cm



ares  
plus

Larghezza / Width:  
41 cm  
Altezza / Height:  
77 cm  
Profondità / Depth:  
41 cm

verso  
plus oven

Larghezza / Width:  
41 cm  
Altezza / Height:  
77 cm  
Profondità / Depth:  
41 cm

ares  
recharge

Larghezza / Width:  
58 cm  
Altezza / Height:  
96 cm  
Profondità / Depth:  
58 cm

ares  
ash

Larghezza / Width:  
40 cm  
Altezza / Height:  
91 cm  
Profondità / Depth:  
41 cm



### maxi mus

Larghezza / Width: 59 cm  
Altezza / Height: 106 cm  
Profondità / Depth: 60 cm



### estro 110

Larghezza / Width: 41 cm  
Altezza / Height: (P) 59 cm  
(I) 77 cm  
Profondità / Depth: 41 cm



### steam wave

Larghezza / Width: 41 cm  
Altezza / Height: 81 cm  
Profondità / Depth: 41 cm



### elect 125

Larghezza / Width: 41 cm  
Altezza / Height: 77 cm  
Profondità / Depth: 41 cm



### vibra 125

Larghezza / Width: 41 cm  
Altezza / Height: 81 cm  
Profondità / Depth: 41 cm



### self service

Larghezza / Width: 59 cm  
Altezza / Height: 106 cm  
Profondità / Depth: 60 cm



### estro 125

Larghezza / Width: 41 cm  
Altezza / Height: (P) 77 cm  
(I) 81 cm  
Profondità / Depth: 41 cm



### steam plus

Larghezza / Width: 50 cm  
Altezza / Height: 107 cm  
Profondità / Depth: 66 cm

### elect 125 M

Larghezza / Width: 41 cm  
Altezza / Height: 77 cm  
Profondità / Depth: 41 cm

### vibra 125 M

Larghezza / Width: 41 cm  
Altezza / Height: 81 cm  
Profondità / Depth: 41 cm

### elect 125 H

Larghezza / Width: 41 cm  
Altezza / Height: 77 cm  
Profondità / Depth: 41 cm



### estro 260-330

Larghezza / Width: 59 cm  
Altezza / Height: 106 cm  
Profondità / Depth: 60 cm



### elect 125 N

Larghezza / Width: 58 cm  
Altezza / Height: 96 cm  
Profondità / Depth: 58 cm

### big vibra 250 B

Larghezza / Width: 59 cm  
Altezza / Height: 106 cm  
Profondità / Depth: 60 cm

### estro HOTWAVE 280

Larghezza / Width: 59 cm  
Altezza / Height: 106 cm  
Profondità / Depth: 60 cm



### elect 125 N

Larghezza / Width: 58 cm  
Altezza / Height: 96 cm  
Profondità / Depth: 58 cm



**ELSEA**  
MADE IN ITALY